FLOOR FINISHES KEY – Refer to 5758[D]840 for details

◇ New Offices & Meeting rooms –
Carpet Tile : To match existing – Lees Squared Type: Golden Rod (2424) Ref: T27722
Replace existing damaged or soiled carpet tiles as required.

◇ Front of-house Reception Floor –
Stone – Retain existing stone floor finish. Make good any damage & buff/polish

◇ Breakout / Cafe zone –
Stone – Retain existing stone floor finish. Make good any damage & buff/polish

◇ Shower / Changing Facility –
Vinyl– Epoxy Vinyl to floor offered up to & dressed on to a 100mm coved skirting detail.
Refer to 5758[D]800 for Vinyl & skirting detail.

◇ Shower / Changing Facility –
Sanitary Equipment – Shower tray with top face set flush to FFL. Refer to 5758[D]800 for Shower details.

WALL FINISHES KEY – Refer to 5758[D]850 for details

(G1) New Office –
Glass : Matt top coat to match existing – 2 layers undercoat.

(P1) New Office & Meeting rooms –
Paint : Matt top coat to match existing – 2 layers undercoat.

(P2) War room –
Paint : Matt Emulsion RAL 5019 top coat – 2 layers of standard white undercoat.

(P3) Specialist areas
Paint : 2 layers of standard white undercoat preparation to receive joinery. Refer to 5758[D]800 & 5758[D]810 for Joinery details.

(T1) Shower / Changing Facility –
Tile – Standard white Ceramic wall tile 200x100mm offered from skirting to underside of ceiling. Off-white grouting with fungal inhibitor. Refer to 5758[D]800 for tile details.

DOOR FINISHES KEY – Refer to 5758[D]860 for door details

NOTE Existing Lift Lobby doors –
Remove existing lift lobby door leaves and store. Make good floor and ceiling as required. Site inspection required.

G1 Main Entrance –
Glass : New glass lobby door with 100mm top and base metal sections to match detail and finish of existing lift lobby doors. 3M dusted crystal manifestation pattern applied to inner face Site inspection required. Refer to 5758[D]860 for details.

G2 Offices –
Glass : Proprietary Sliding glass door to match existing office doors. 3M dusted crystal manifestation pattern applied to inner face. Satin s.s. 'D' form pull-push handles to either side. Site inspection required. Refer to 5758[D]860 for details.

S1 Meeting room –
Solid : Cherry veneer finish with 3M dusted crystal manifestation film applied to inner face of vision panel. Satin s.s. lever, Rose and Thumb turn cylinder lock..

S2 Shower / Changing Facility –
Solid : Cherry veneer finish with satin s.s. kick plates and 'D' form pull-push handles to either side. Satin s.s. disabled turn and release lock with indicator to be fitted.

EXISTING FINISHES –

NOTE GENERAL : Existing General open plan, Office & Meeting rooms –
Protect all existing finishes as necessary. Site inspection required.

◇ FLOORS : Existing General open plan, Office & Meeting rooms –
Replace existing damaged or soiled carpet tiles as required. [Make & Type tbc]
Site inspection & report required.

(E) WALLS : General open plan, Existing Office & Meeting rooms –
Make good any damage to existing wall surfaces and redecorate to match existing.
Site inspection & report required.

E DOORS : Existing General open plan, Office & Meeting rooms –
Make good any damage to existing doors and perimeter elements and redecorate to match existing. Site inspection & report required.

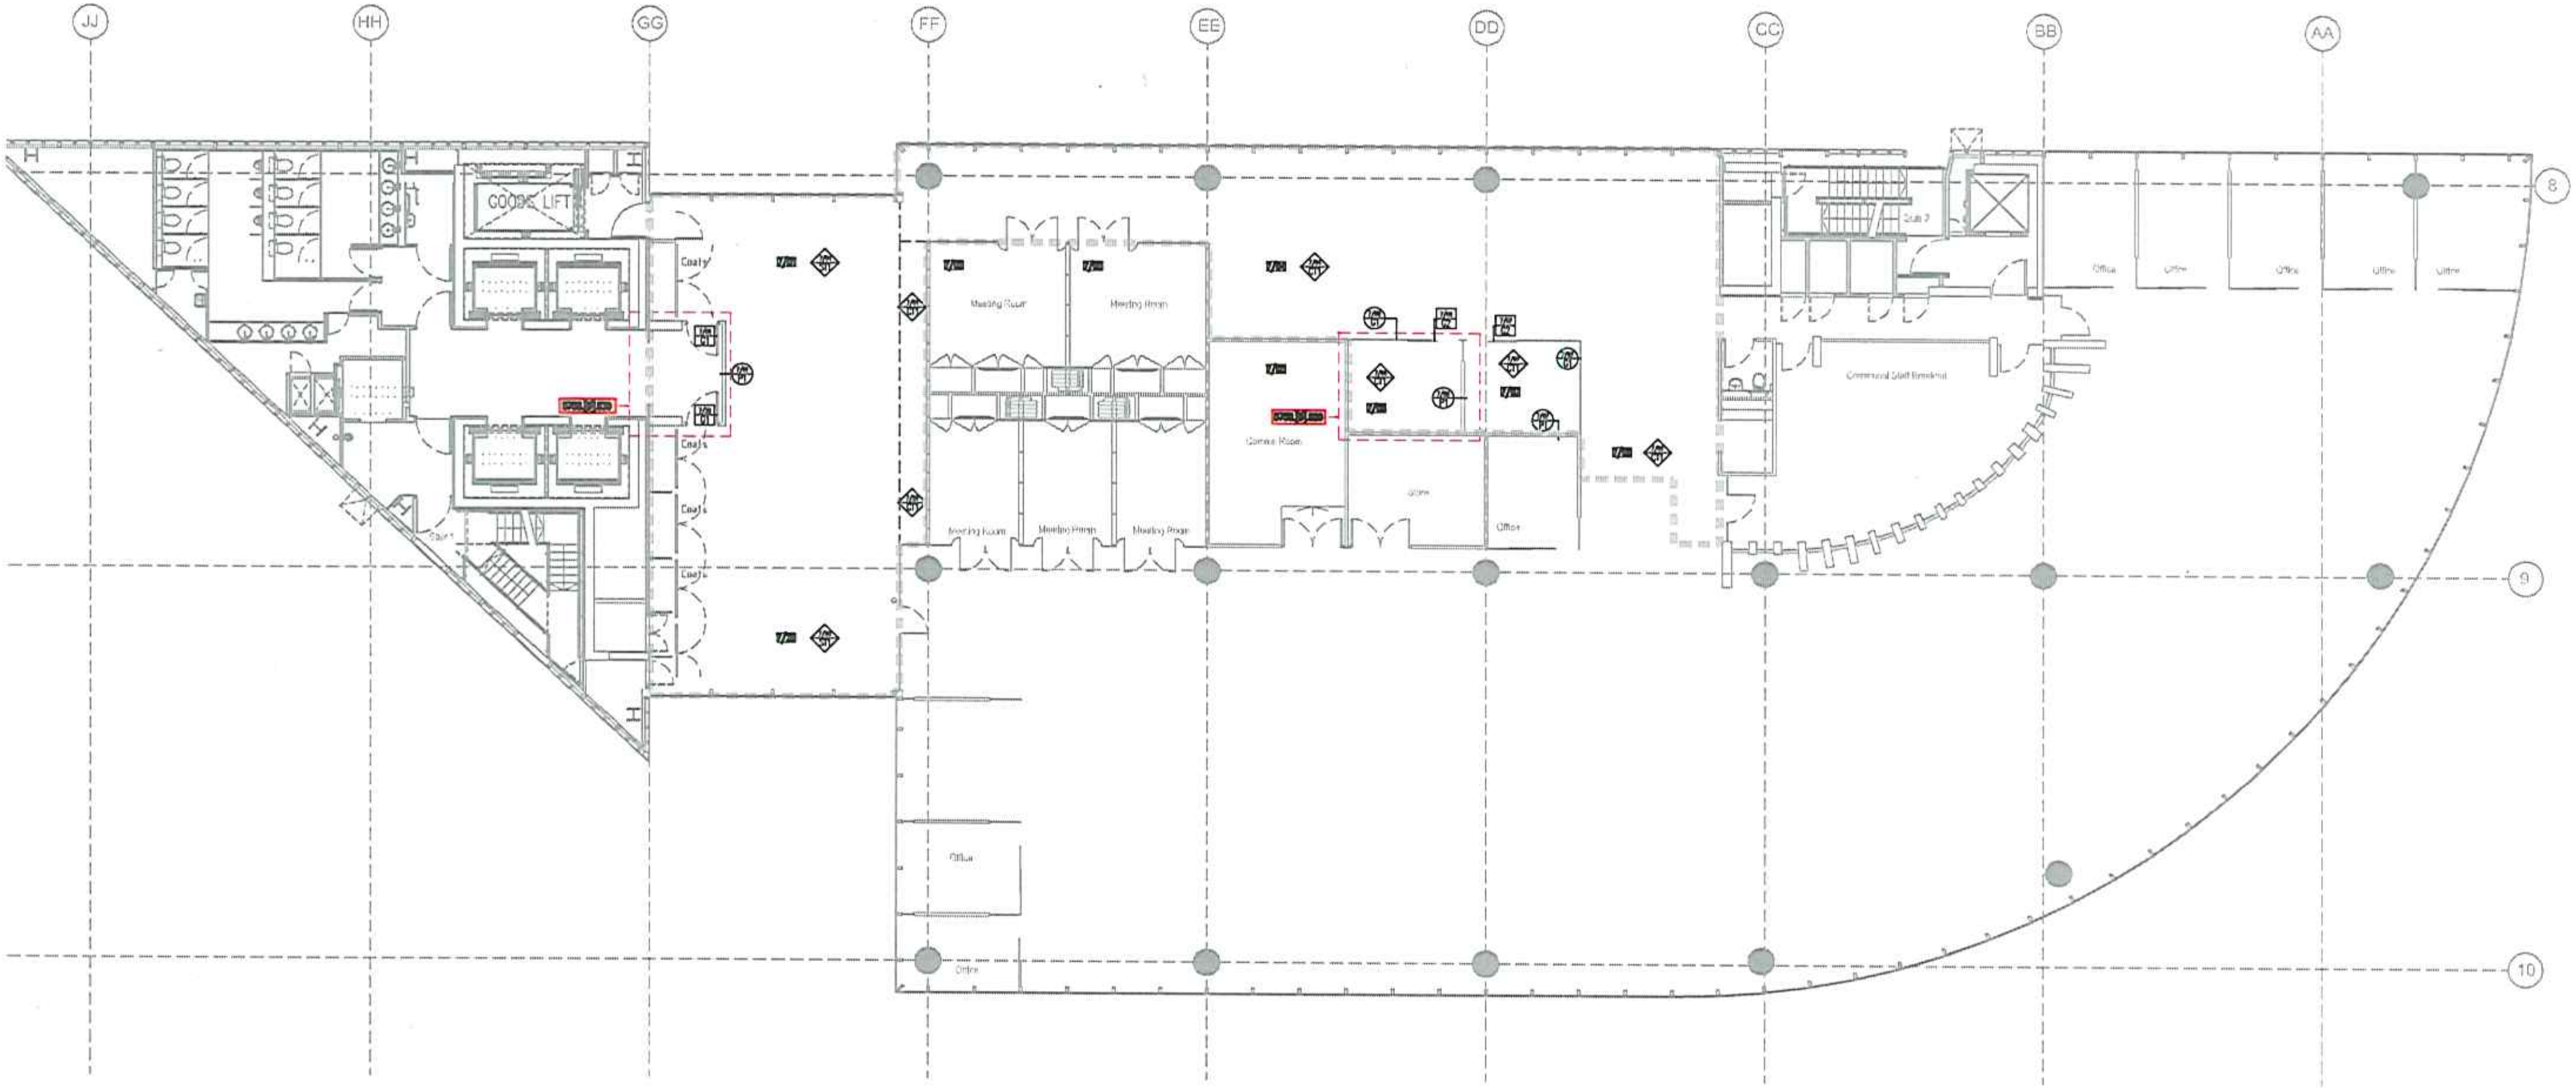

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepencies notified in writing

This drawing and information shown are the copyright of Cochrane McGregor

FOR CONSTRUCTION

Rev	Details	Date
–		–

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel | 020 7378 1828 Fax | 020 7378 1834
email | design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client **Markit**

Project
2 More London Riverside
London SE1 2JT

Title
7th Floor Proposed
Finishes Layout Phase 1

Scale 1:100 @ A1
Date 10 . 11 . 07
Drawn By RIT
Checked By
Project No 5758
Dwg. No [7] 701
Rev. -

DOOR TYPES – Refer to 5758[D]860 for details

G.1 Laminated single glazed door system with a 100mm metal head and base section to match existing lift lobby doors. Set in a metal frame with low friction hinges and 30N rebated floor set closer. Head mounted BMS linked Maglock door control system and securing deadlock to base section. All metal elements to be powder coated and finished in RAL 9010. 3M dusted crystal manifestation pattern applied to inner face. Vertical Push-Pull 'D' form handles finished in satin s.s. For details refer to 5758[D]860

G.2 Proprietary Optima 117 frameless laminated single glazed sliding door system or similar set from FFL to underside of suspended ceiling. Minimal head and base channel fixing detail. All metal to be powder coated and finished in RAL 9010. 3M dusted crystal manifestation pattern applied to inner face. Vertical Push-Pull 'D' form handles finished in satin s.s. For details refer to 5758[D]860

SOLID PARTITION TYPES – 5758[D]870 for details

S.1 100mm nominal stud partition from raised floor to suspended ceiling – 48mm metal stud system set at 300mm c/s. Faced with an inner layer of 12 mm plywood and an outer layer of 12.5mm Gyproc soundbloc on the internal face. Faced with inner layer of 12.5mm Gyproc soundbloc plasterboard and an outer layer of 12.5mm Gyproc wallboard on the external face. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions to be sealed using a proprietary intumescent sealant. 100mm high square edged flush MDF skirting with shadow gap detail both sides.

S.2 100mm nominal stud partition from raised floor to suspended ceiling – 48mm metal stud system set at 300mm c/s. Faced with an inner layer of 12 mm plywood and an outer layer of 12.5mm Gyproc soundbloc on both sides. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions to be sealed using a proprietary intumescent sealant. 100mm high square edged flush mdf skirting with shadow gap detail both sides.

GLAZED PARTITION TYPES –

G.1 Proprietary Optima 117 frameless single glazed partition system set from FFL to underside of suspended ceiling. Minimal head and base fixing channel detail. All exposed metal to be powder coated and finished in RAL 9010. 3M dusted crystal manifestation film to be applied to inner face. Vertical Push-Pull 'D' form handles finished in satin s.s. For details refer to 5758[D]860

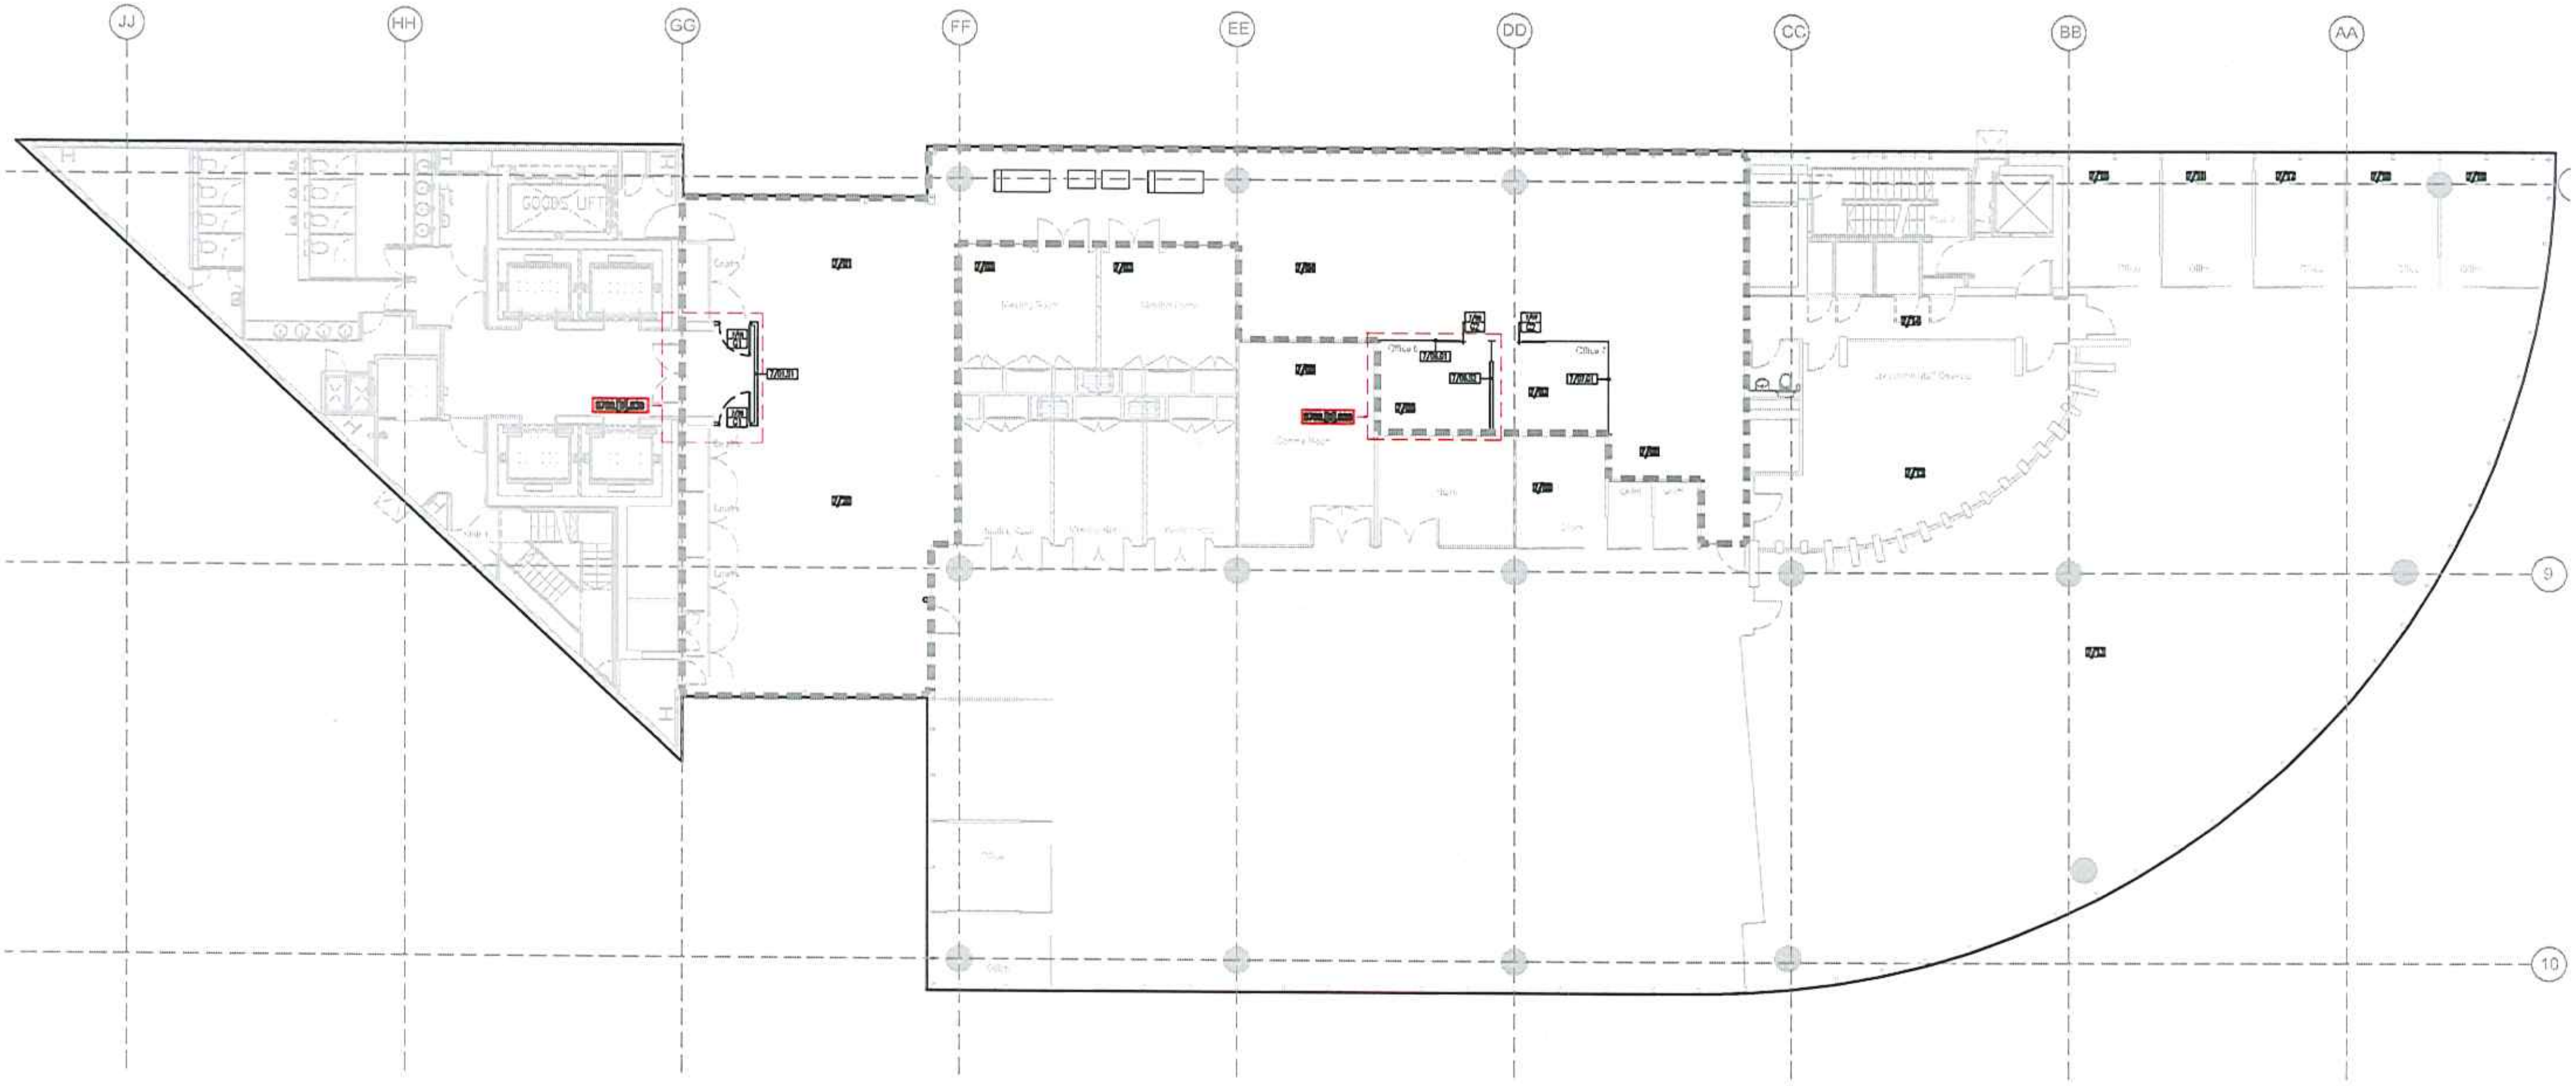

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

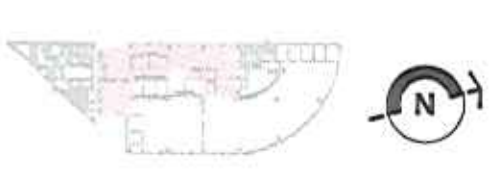

FOR CONSTRUCTION

Rev	Details	Date

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel | 020 7378 1828 Fax | 020 7378 1834
email | design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client Markit

Project
2 More London Riverside
London SE1 2JT

Title
7th Floor Proposed phase I
Partition Layout Plan

Scale 1:100 @ A1
Date 20 . 09 . 07
Drawn By JM
Checked By
Project No 5758
Dwg No [7] 401
Rev.

DOOR TYPES – Refer to 5758[D]860 for door details

S.1 Meeting room –
Solid : Solid timber door and frame with vision panel and integrated accoustic seal system. Low friction hinges and 30N rebated floor set closer. Satin s.s. lever and rose and thumb turn cylinder lock.

S.2 Shower / Changing Facility –
Solid : Moisture resistant solid timber door and frame with moisture seal system. Moisture resistant low friction hinges and 30N rebated floor set closer. 100mm high moister treated satin s.s. kick plates and 'D' form pull–push handles to either side. Disabled turn and release lock with indicator to be fitted.

SOLID PARTITION TYPES – 5758[D]870 for details

S.1 100mm nominal stud partition from raised floor to suspended ceiling – 48mm metal stud system set at 300mm c/s. Faced with an inner layer of 12 mm plywood and an outer layer of 12.5mm Gyproc soundbloc on the internal face. Faced with inner layer of 12.5mm Gyproc soundbloc plasterboard and an outer layer of 12.5mm Gyproc wallboard on the external face. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions to be sealed using a proprietary intumescent sealant. 100mm high square edged flush MDF skirting with shadow gap detail both sides.

S.2 100mm nominal stud partition from raised floor to suspended ceiling – 48mm metal stud system set at 300mm c/s. Faced with an inner layer of 12 mm plywood and an outer layer of 12.5mm Gyproc soundbloc on both sides. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions to be sealed using a proprietary intumescent sealant. 100mm high square edged flush MDF skirting with shadow gap detail both sides.

S.3 100mm nominal stud partition from Raised floor to suspended ceiling – 48mm metal stud system set at 300mm c/s.
Faced with 2 layers of 12.5mm Gyproc soundbloc on each side. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. 100mm high square edged flush hardboard skirting with shadow gap detail on both sides. All penetrations, gaps and perimeter junctions to be sealed using a proprietary intumescent sealant.

S.4 112mm nominal stud partition from slab to suspended ceiling – 48mm metal stud system set at 300mm c/s. Dressed with 3 layers of 12.5mm Gyproc soundbloc on the meeting room side. Faced with an inner layer of 12mm plywood and an outer layer of Gyproc mioeture resistant plasterboard on the shower side. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions to be sealed using a proprietary intumescent sealant. 100mm high flush and square edged MDF skirting with shadow gapdetail on meeting room side only.

S.5 100mm nominal stud partition from slab to suspended ceiling – 48mm metal stud system set at 300mm c/s.
Faced with an inner layer of 12 mm plywood and an outer layer of 12.5mm Sound bloc on the internal face. Faced with 3 layers of 12.5mm Gyproc soundbloc on the external face. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions are to be sealed using a proprietary intumescent sealant. 100mm high square edged flush MDF skirting with shadow gap detail.

S.6 100mm nominal stud partition from slab to suspended ceiling – 48mm metal stud system set at 300mm c/s. Faced with an inner layer of 12 mm plywood and an outer layer of 12.5mm Gyproc moisture resistant plasterboard on the shower side. Faced with 2 layers of 12.5mm Gyproc Soundbloc on the external face. Cavity to be filled with 50mm 1200 Isowool mineral wool quilt. All penetrations, gaps and perimeter junctions are to be sealed using a proprietary intumescent sealant. 100mm high square edged flush MDF skirting detail on non-shower side only.

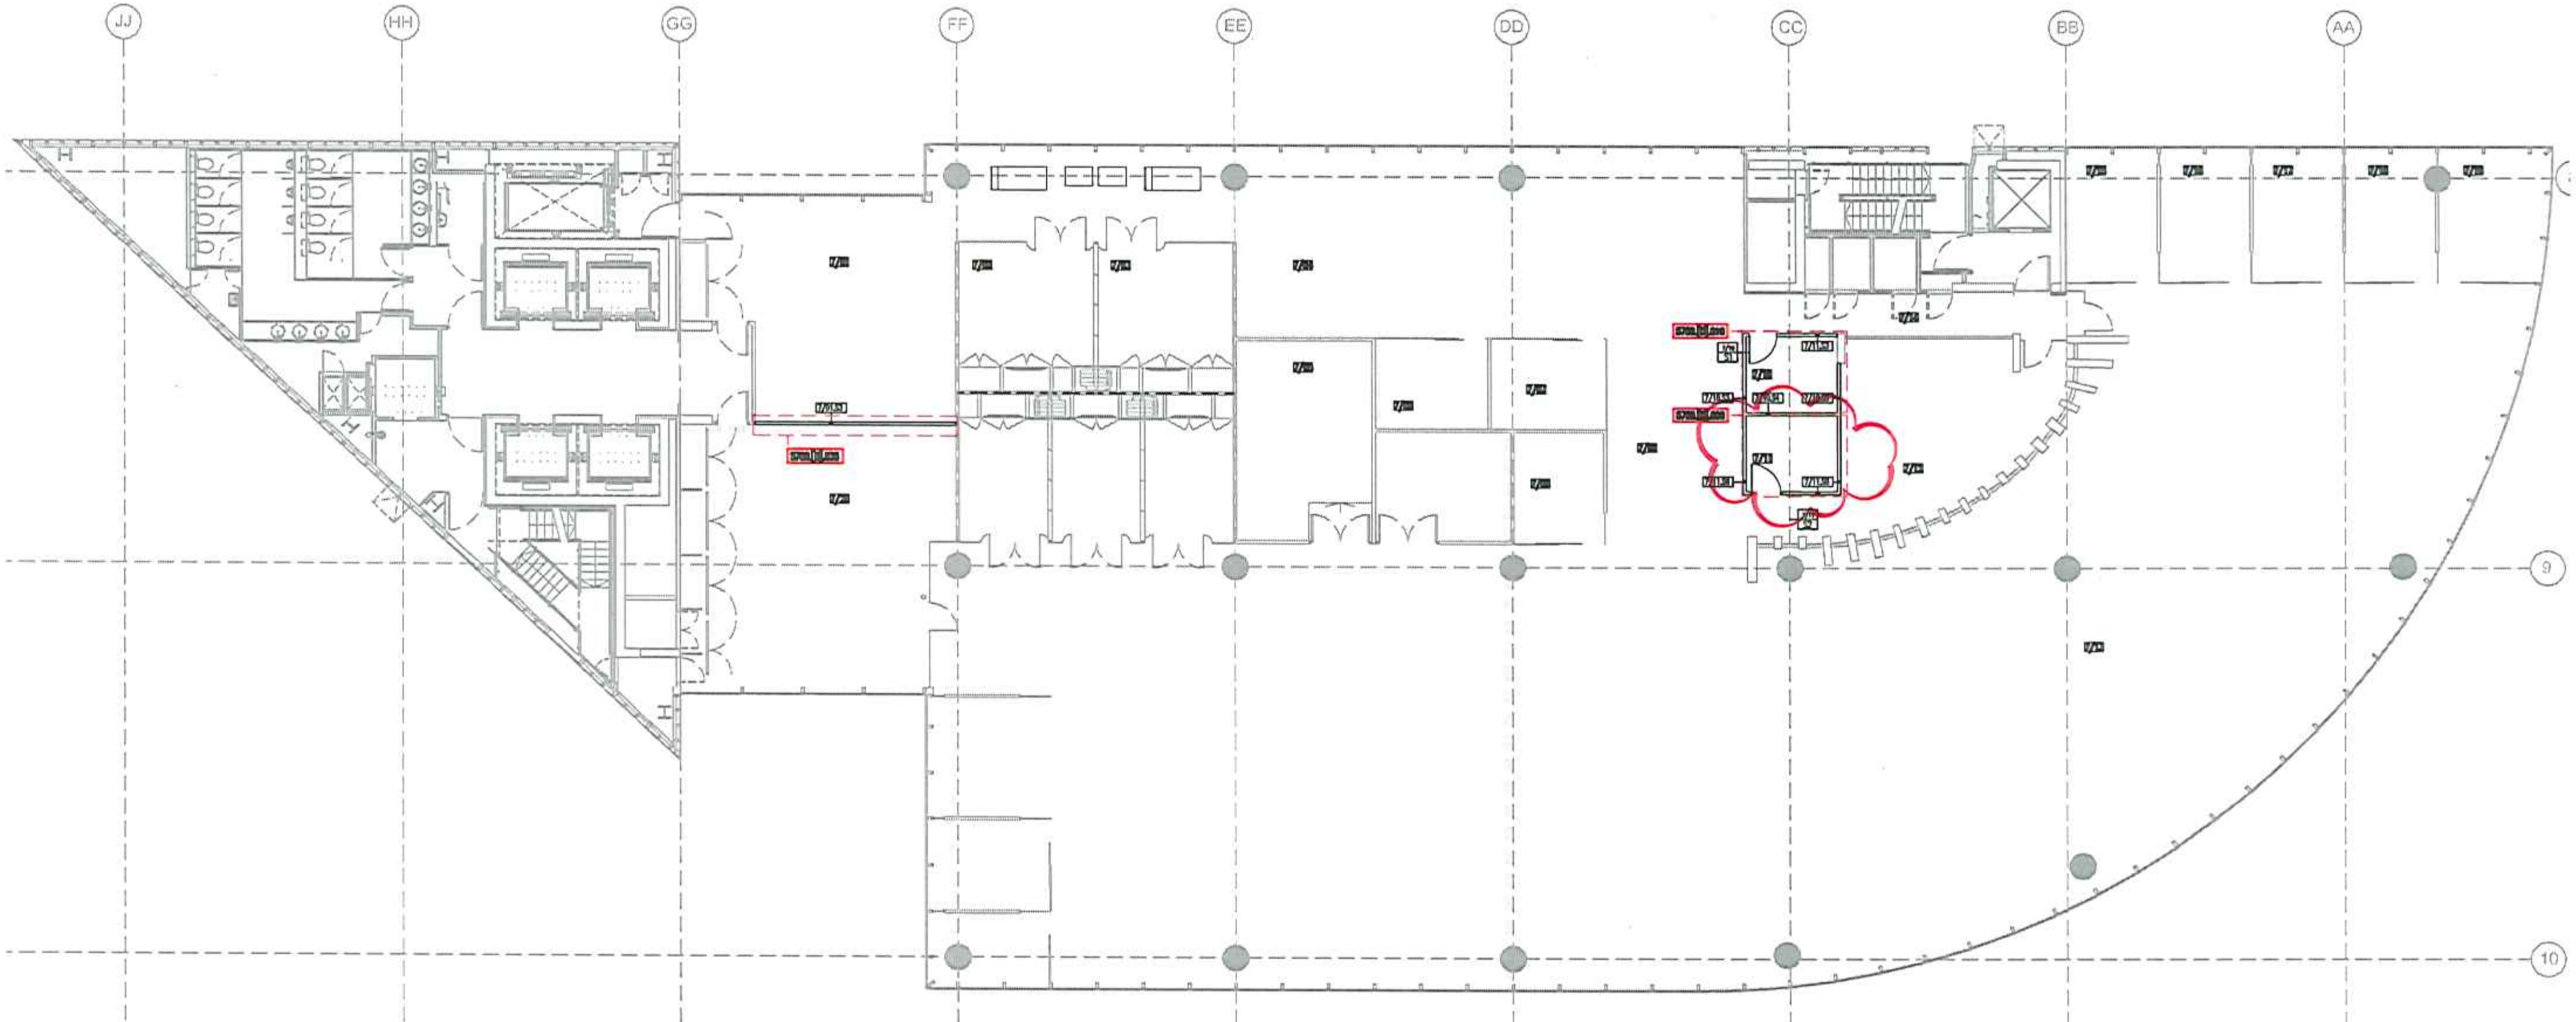

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

FOR CONSTRUCTION

Rev	Details	Date
A	Layout and space amended.	22.11.07

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel : 020 7378 1828 Fax : 020 7378 1834
email : design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client Markit
Project 2 More London Riverside
London SE1 2JT
Title 7th Floor Proposed phase 2
Partition Layout Plan

Scale 1:100 @ A1
Date 20 . 09 . 07
Drawn By JM
Checked By
Project No 5758
Dwg. No [7] 402a
Rev

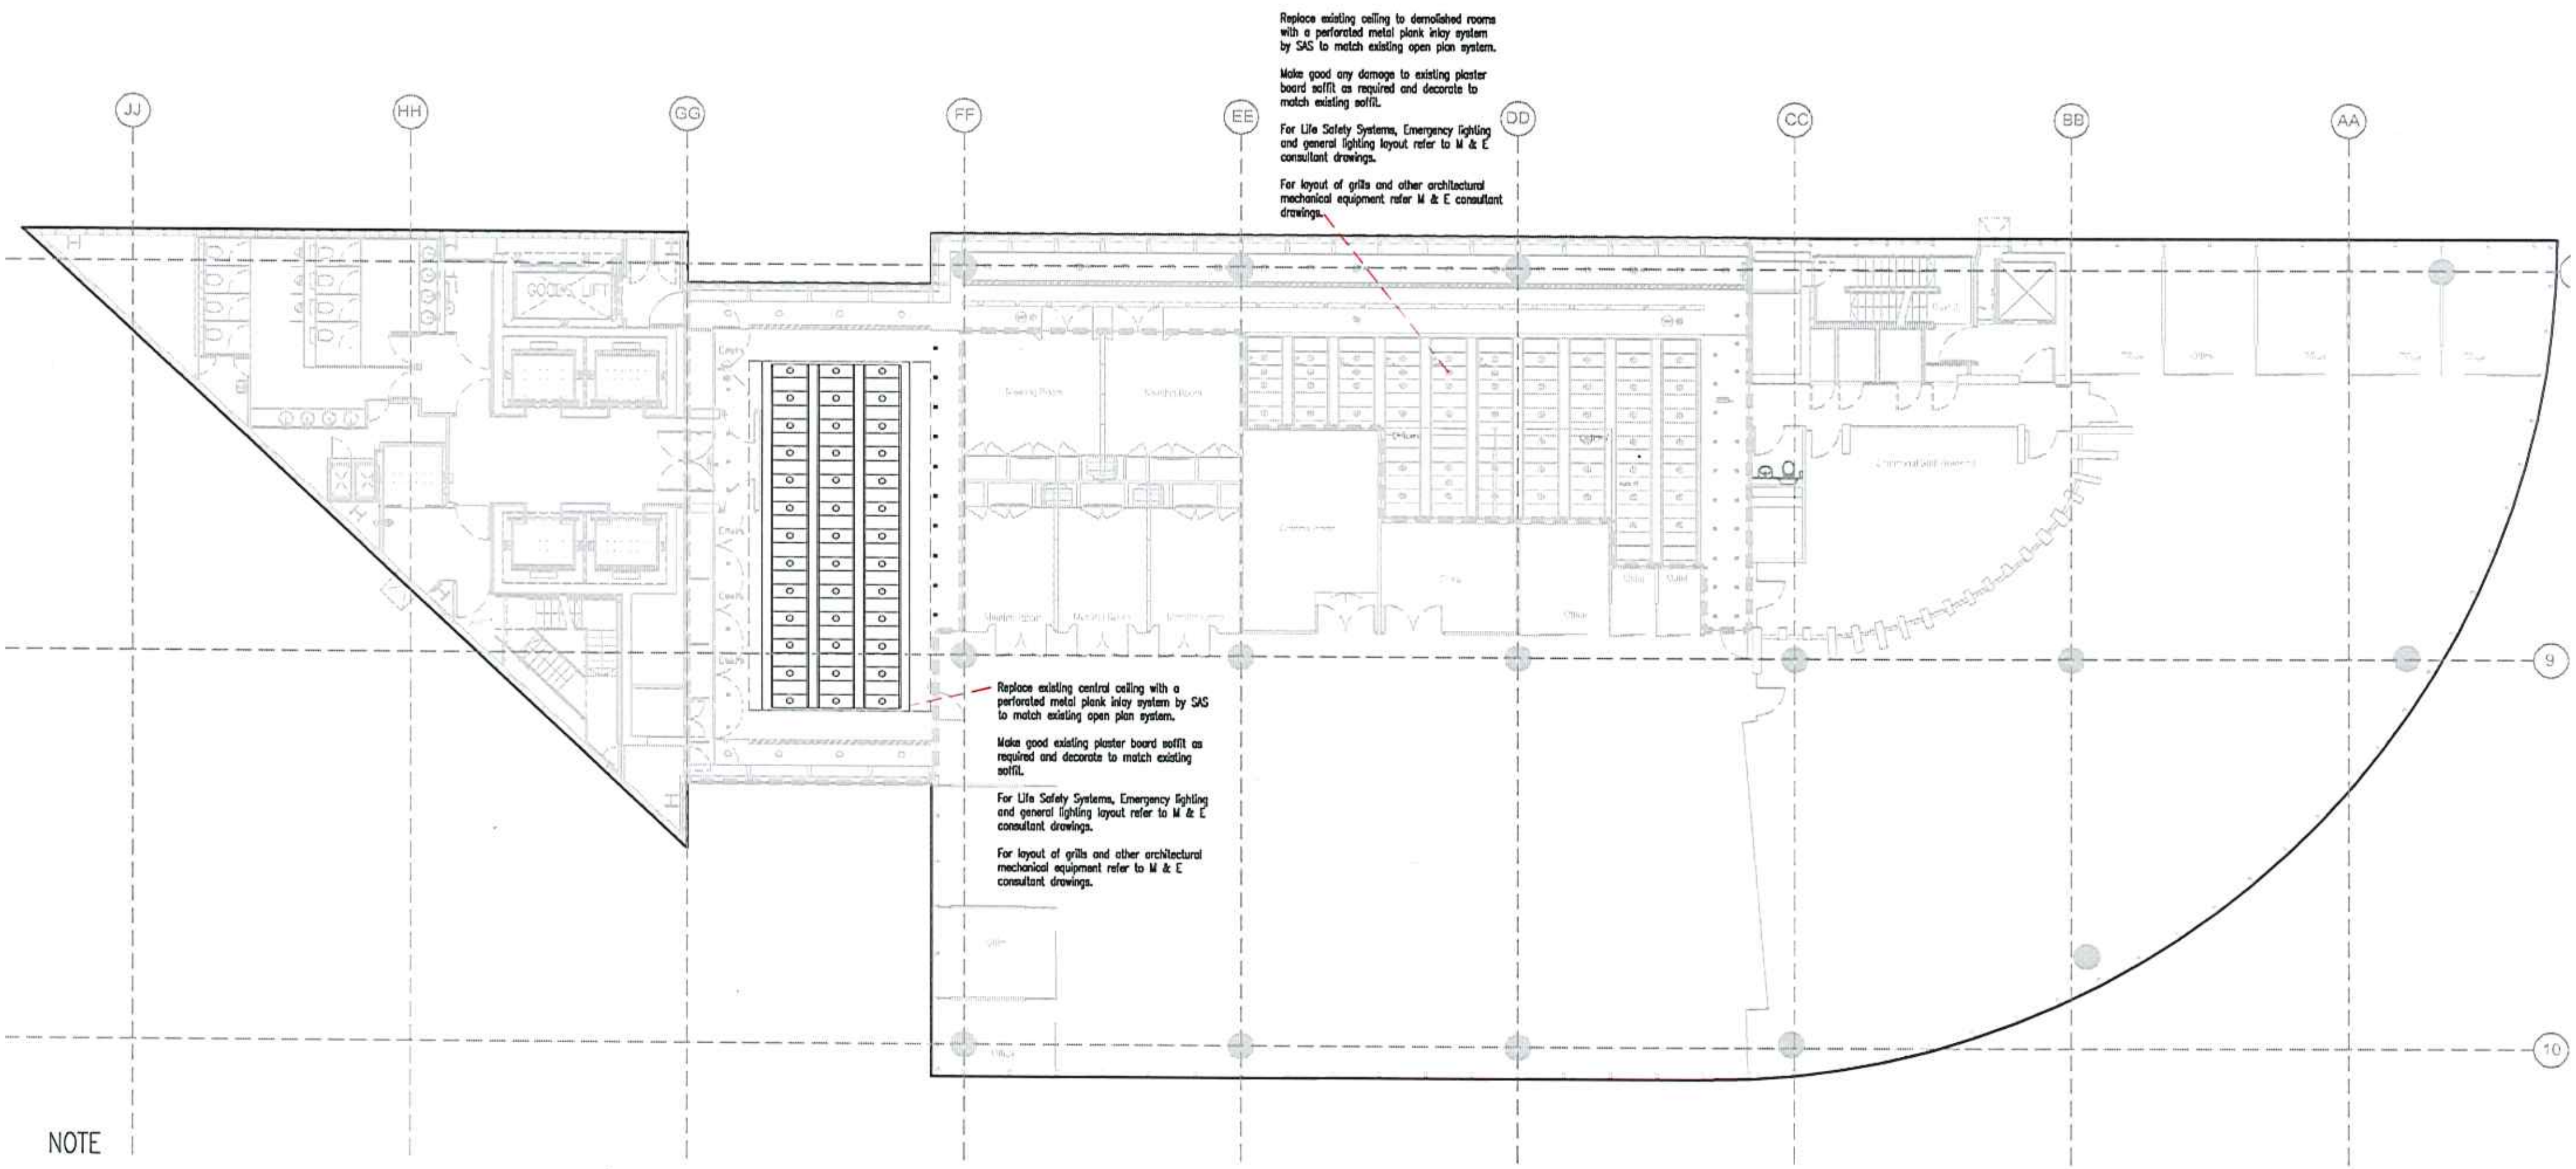
JJ
HH
GG
FF
EE
DD
CC
BB
AA
9
10
GOODS LIFT
Replace existing ceiling to demolished rooms with a perforated metal plank inlay system by SAS to match existing open plan system.
Make good any damage to existing plaster board soffit as required and decorate to match existing soffit.
For Life Safety Systems, Emergency lighting and general lighting layout refer to M & E consultant drawings.
For layout of grills and other architectural mechanical equipment refer M & E consultant drawings.
Replace existing central ceiling with a perforated metal plank inlay system by SAS to match existing open plan system.
Make good existing plaster board soffit as required and decorate to match existing soffit.
For Life Safety Systems, Emergency lighting and general lighting layout refer to M & E consultant drawings.
For layout of grills and other architectural mechanical equipment refer to M & E consultant drawings.

NOTE

Repalce any damaged ceiling planks to match existing SAS sytem. System reference to be confirmed.

Make good any damaged plasterboard soffit to match existing as required.

For Life Safety Systems, Emergency lighting and general lighting layout refer to M & E consultant drawings.

For layout of grills,other architectural mechanical equipment refer to M & E consultant drawings.

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

This drawing and information shown are the copyright of Cochrane McGregor

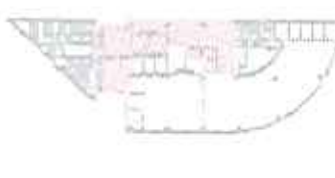

FOR CONSTRUCTION

Rev Details Date

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel : 020 7378 1820 Fax : 020 7378 1834
email : design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client Markit
Project 2 More London Riverside
London SE1 2JT
Title 7th Floor - Proposed Phase 1
Reflected Ceiling Plan

Scale 1:100 @ A1
Date 06 . 09 . 07
Drawn By RT
Checked By
Project No 5758
Dwg No [7] 501
Rev.

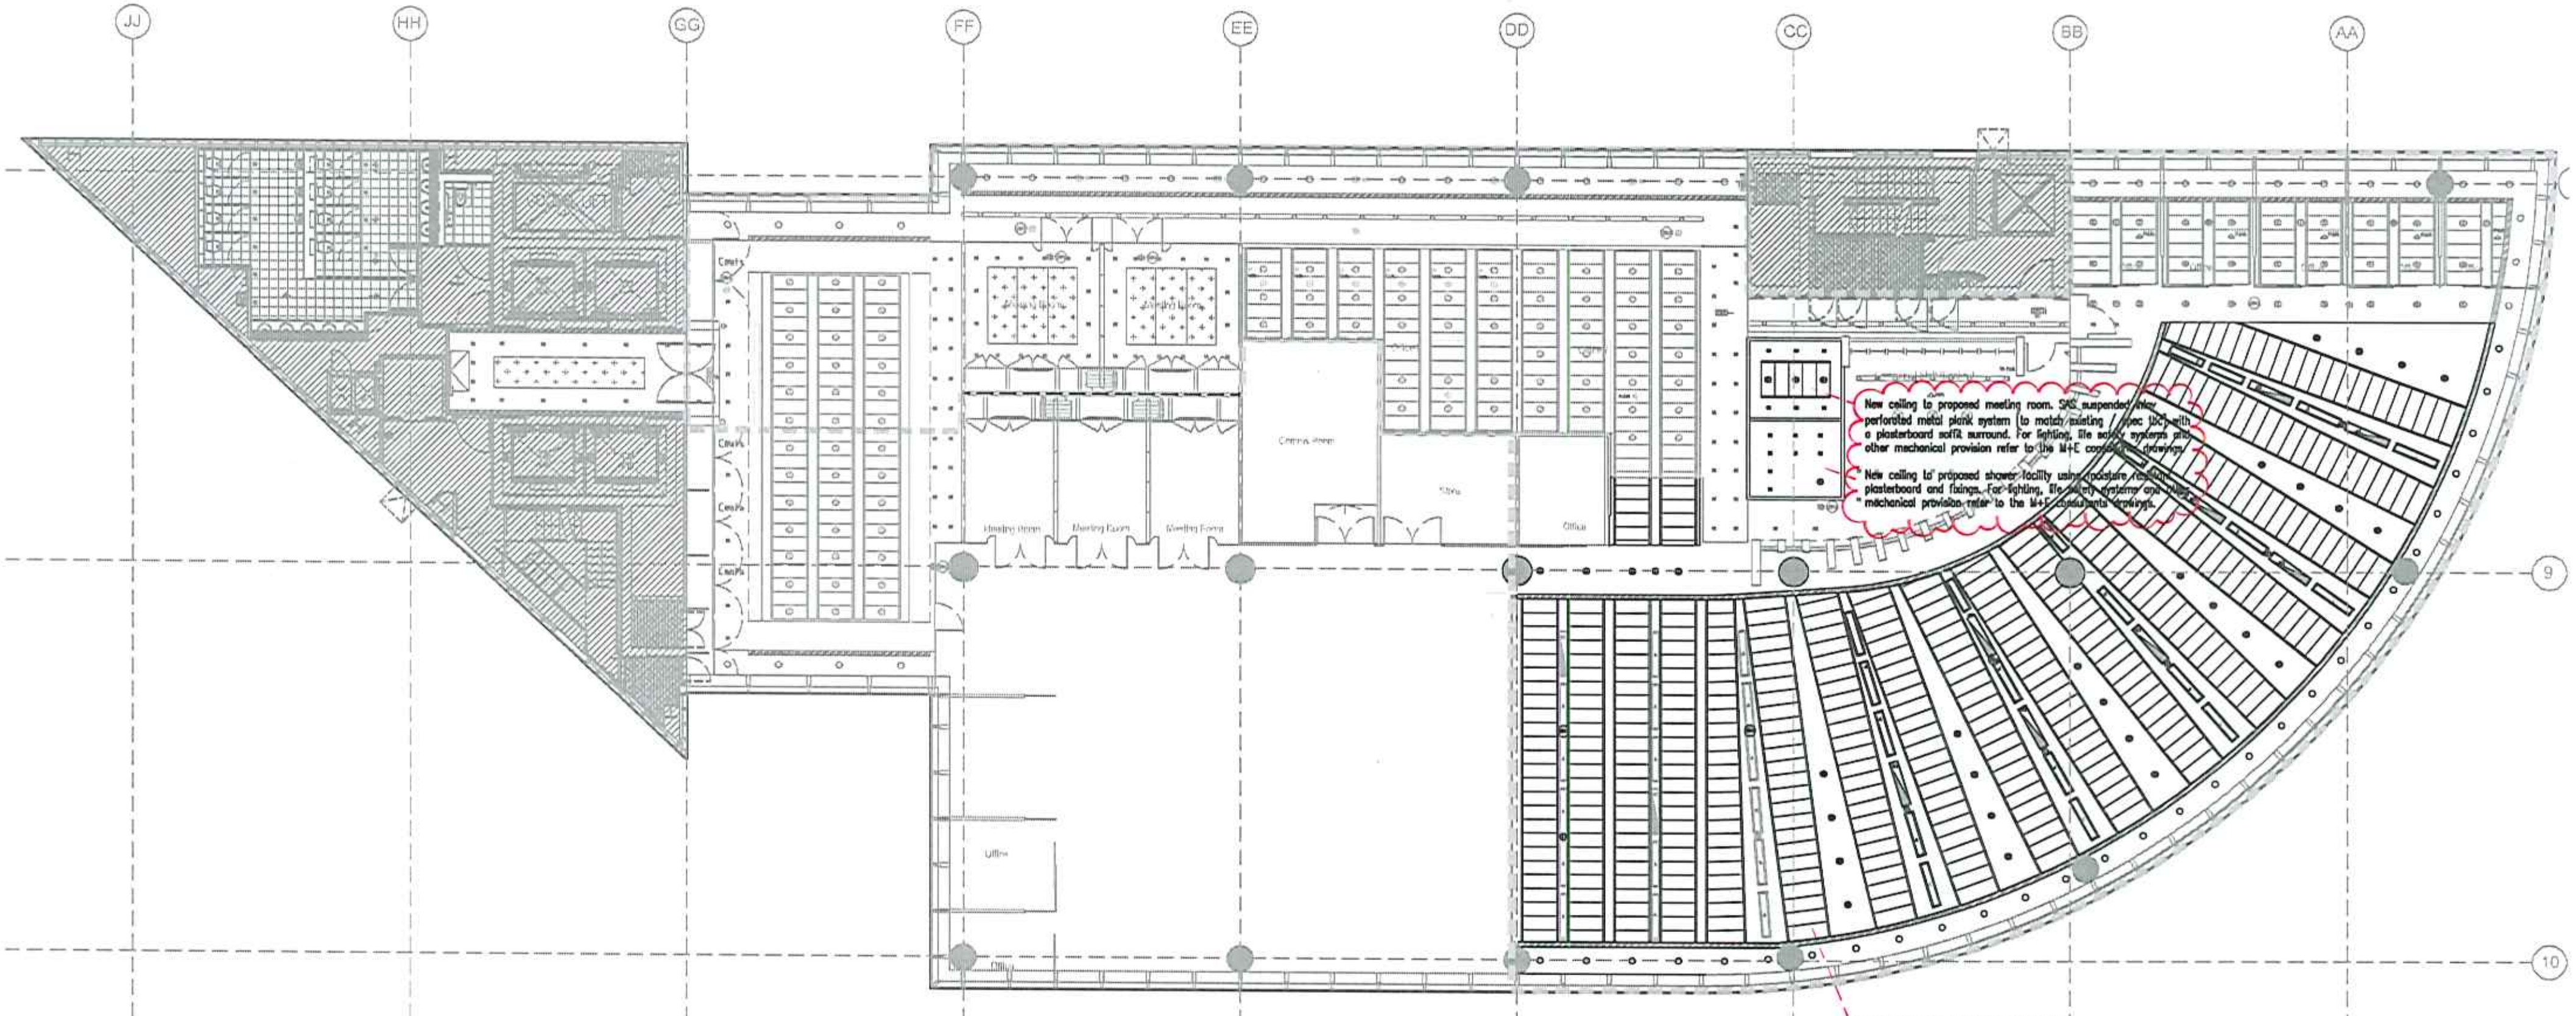

New ceiling to proposed meeting room. SAS suspended linear perforated metal plank system (to match existing / spec 10C) with a plasterboard soffit surround. For lighting, life safety systems and other mechanical provision refer to the M+E consultants drawings.

New ceiling to proposed shower facility using moisture resistant plasterboard and fixings. For lighting, life safety systems and other mechanical provision refer to the M+E consultants drawings.

For Life Safety Systems, Emergency lighting and general lighting layout refer to M & E consultant drawings.

For layout of grills and other architectural mechanical equipment refer to M & E consultant drawings.

NOTE

Repalce any damaged ceiling planks to match existing SAS sytem. System reference to be confirmed.

Make good any damaged plasterboard soffit to match existing as required.

For Life Safety Systems, Emergency lighting and general lighting layout refer to M & E consultant drawings.

For layout of grills,other architectural mechanical equipment refer to M & E consultant drawings.

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

FOR CONSTRUCTION

Rev	Details	Date
A	Space notes amended.	22.11.07

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel: 020 7378 1828 Fax: 020 7378 1834
email: design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client Markit

Project 2 More London Riverside
London SE1 2JT

Title 7th Floor - Proposed Phase 2
Reflected Ceiling Works

Scale 1:100 @ A1
Date 14 . 09 . 07
Drawn By RT
Checked By
Project No 5758
Dwg. No [7] 502
Rev. A

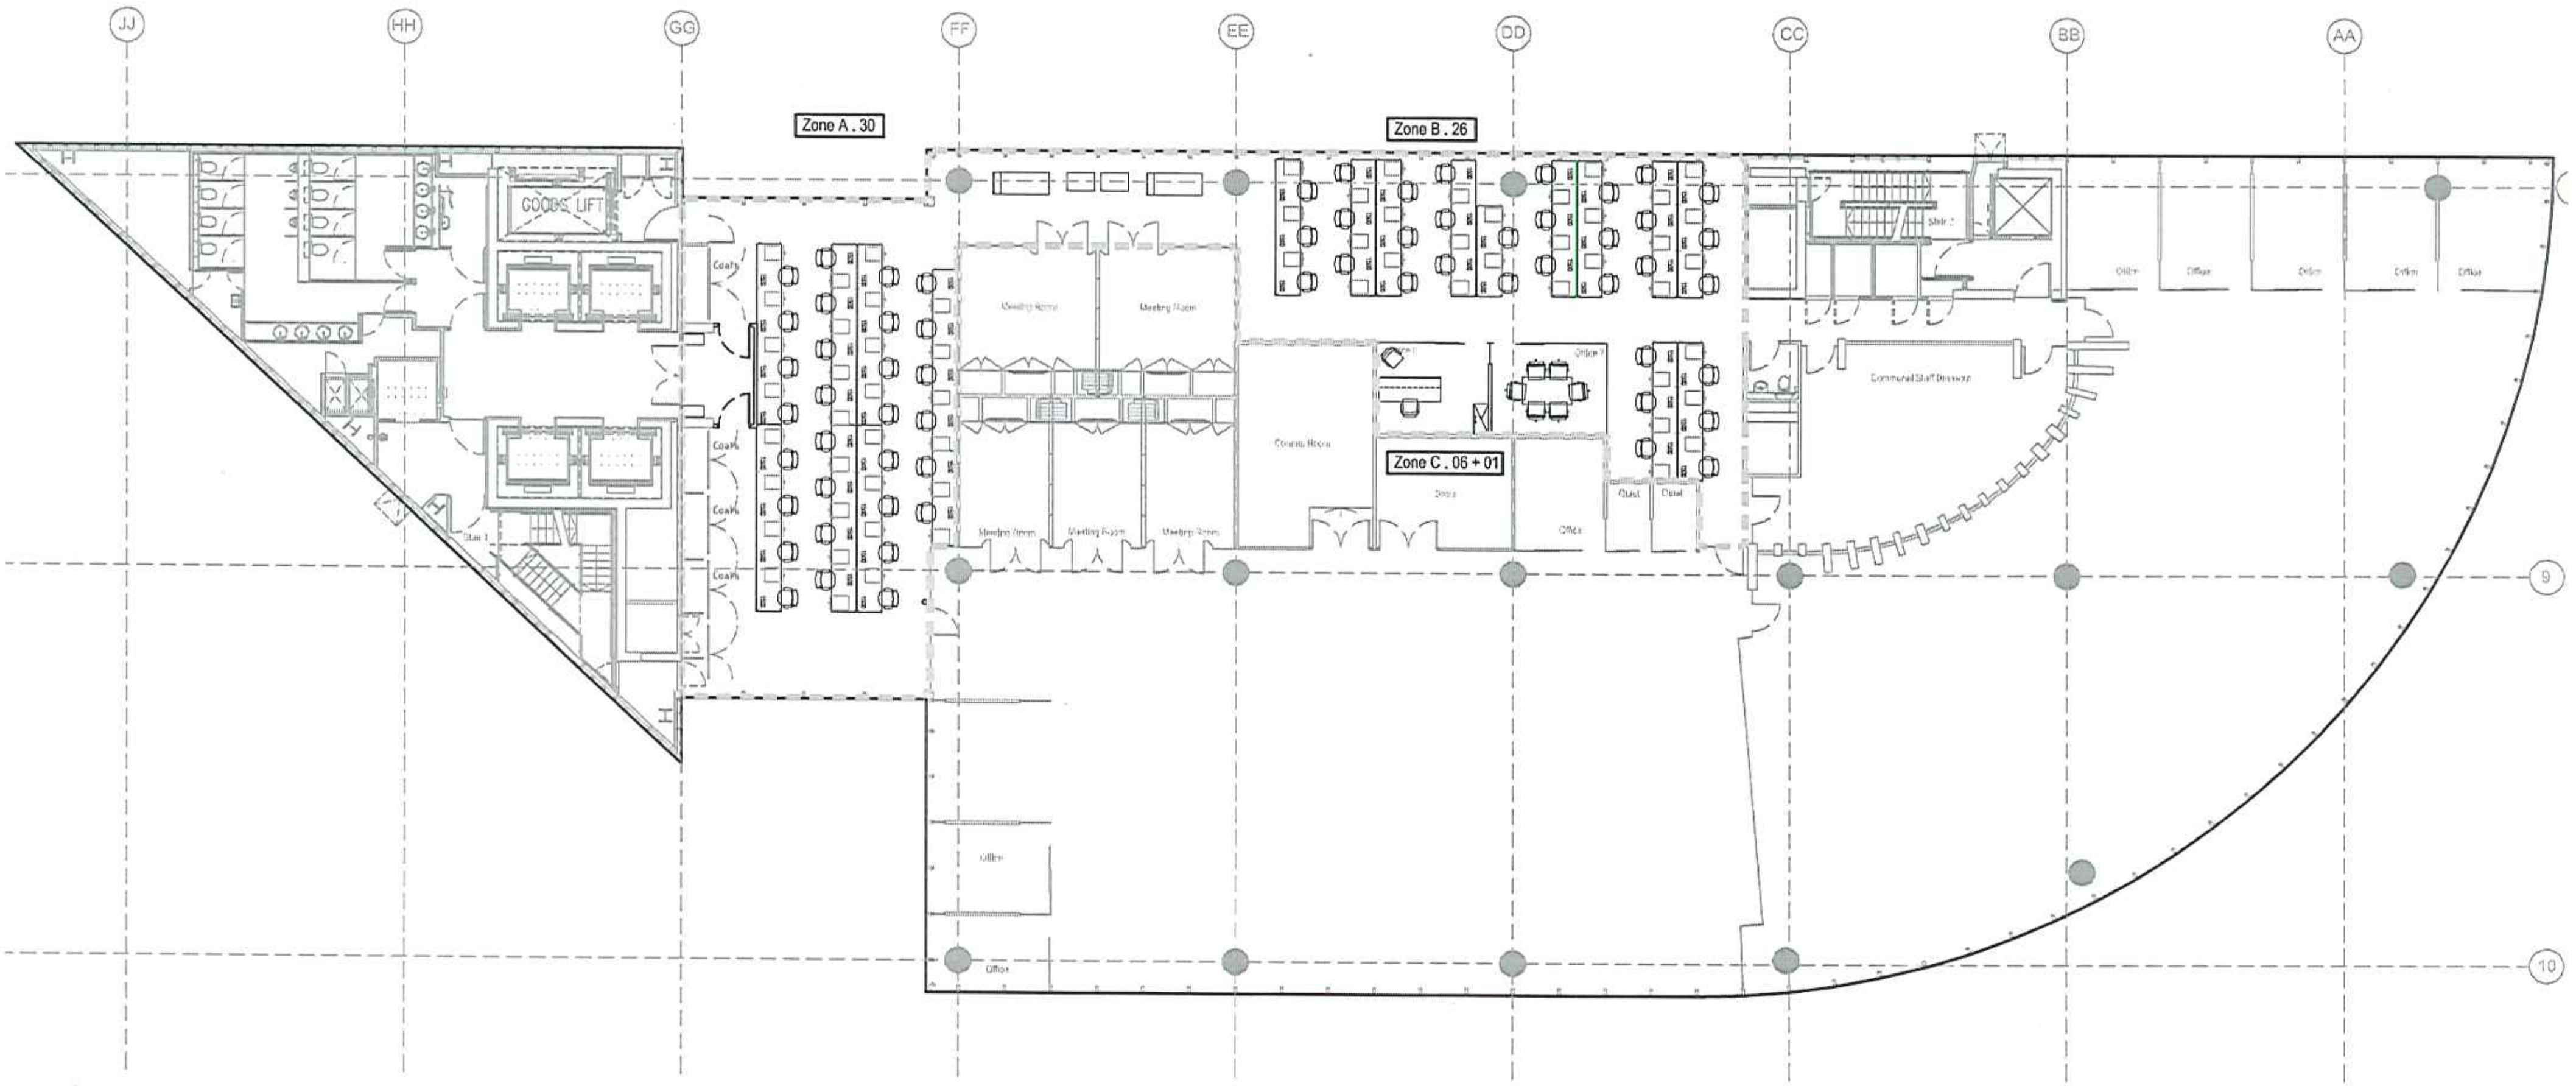
JJ
HH
GG
FF
EE
DD
CC
BB
AA
9
10
Zone A . 30
Zone B . 26
Zone C . 06 + 01
GOODS LIFT
Coats
Meeting Room
Comms Room
Store
Office
Quiet
Communal Staff Breakout
Stair 1
Stair 2

Phase 1 @ 1500 working module

Zone A = 30
Zone B = 26
Zone C = 06 + 01

Total = 62 + 01

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

FOR CONSTRUCTION

Rev Details Date

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel : 020 7378 1828 Fax : 020 7378 1834
email : design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client **Markit**

Project **2 More London Riverside**
London SE1 2JT

Title **7th Floor Proposed phase 1**
Furniture Layout Plan

Scale 1:100 @ A1 @ A1
Date 20 . 09 . 07
Drawn By JM
Checked By
Project No 5758
Dwg No [7] 901
Rev

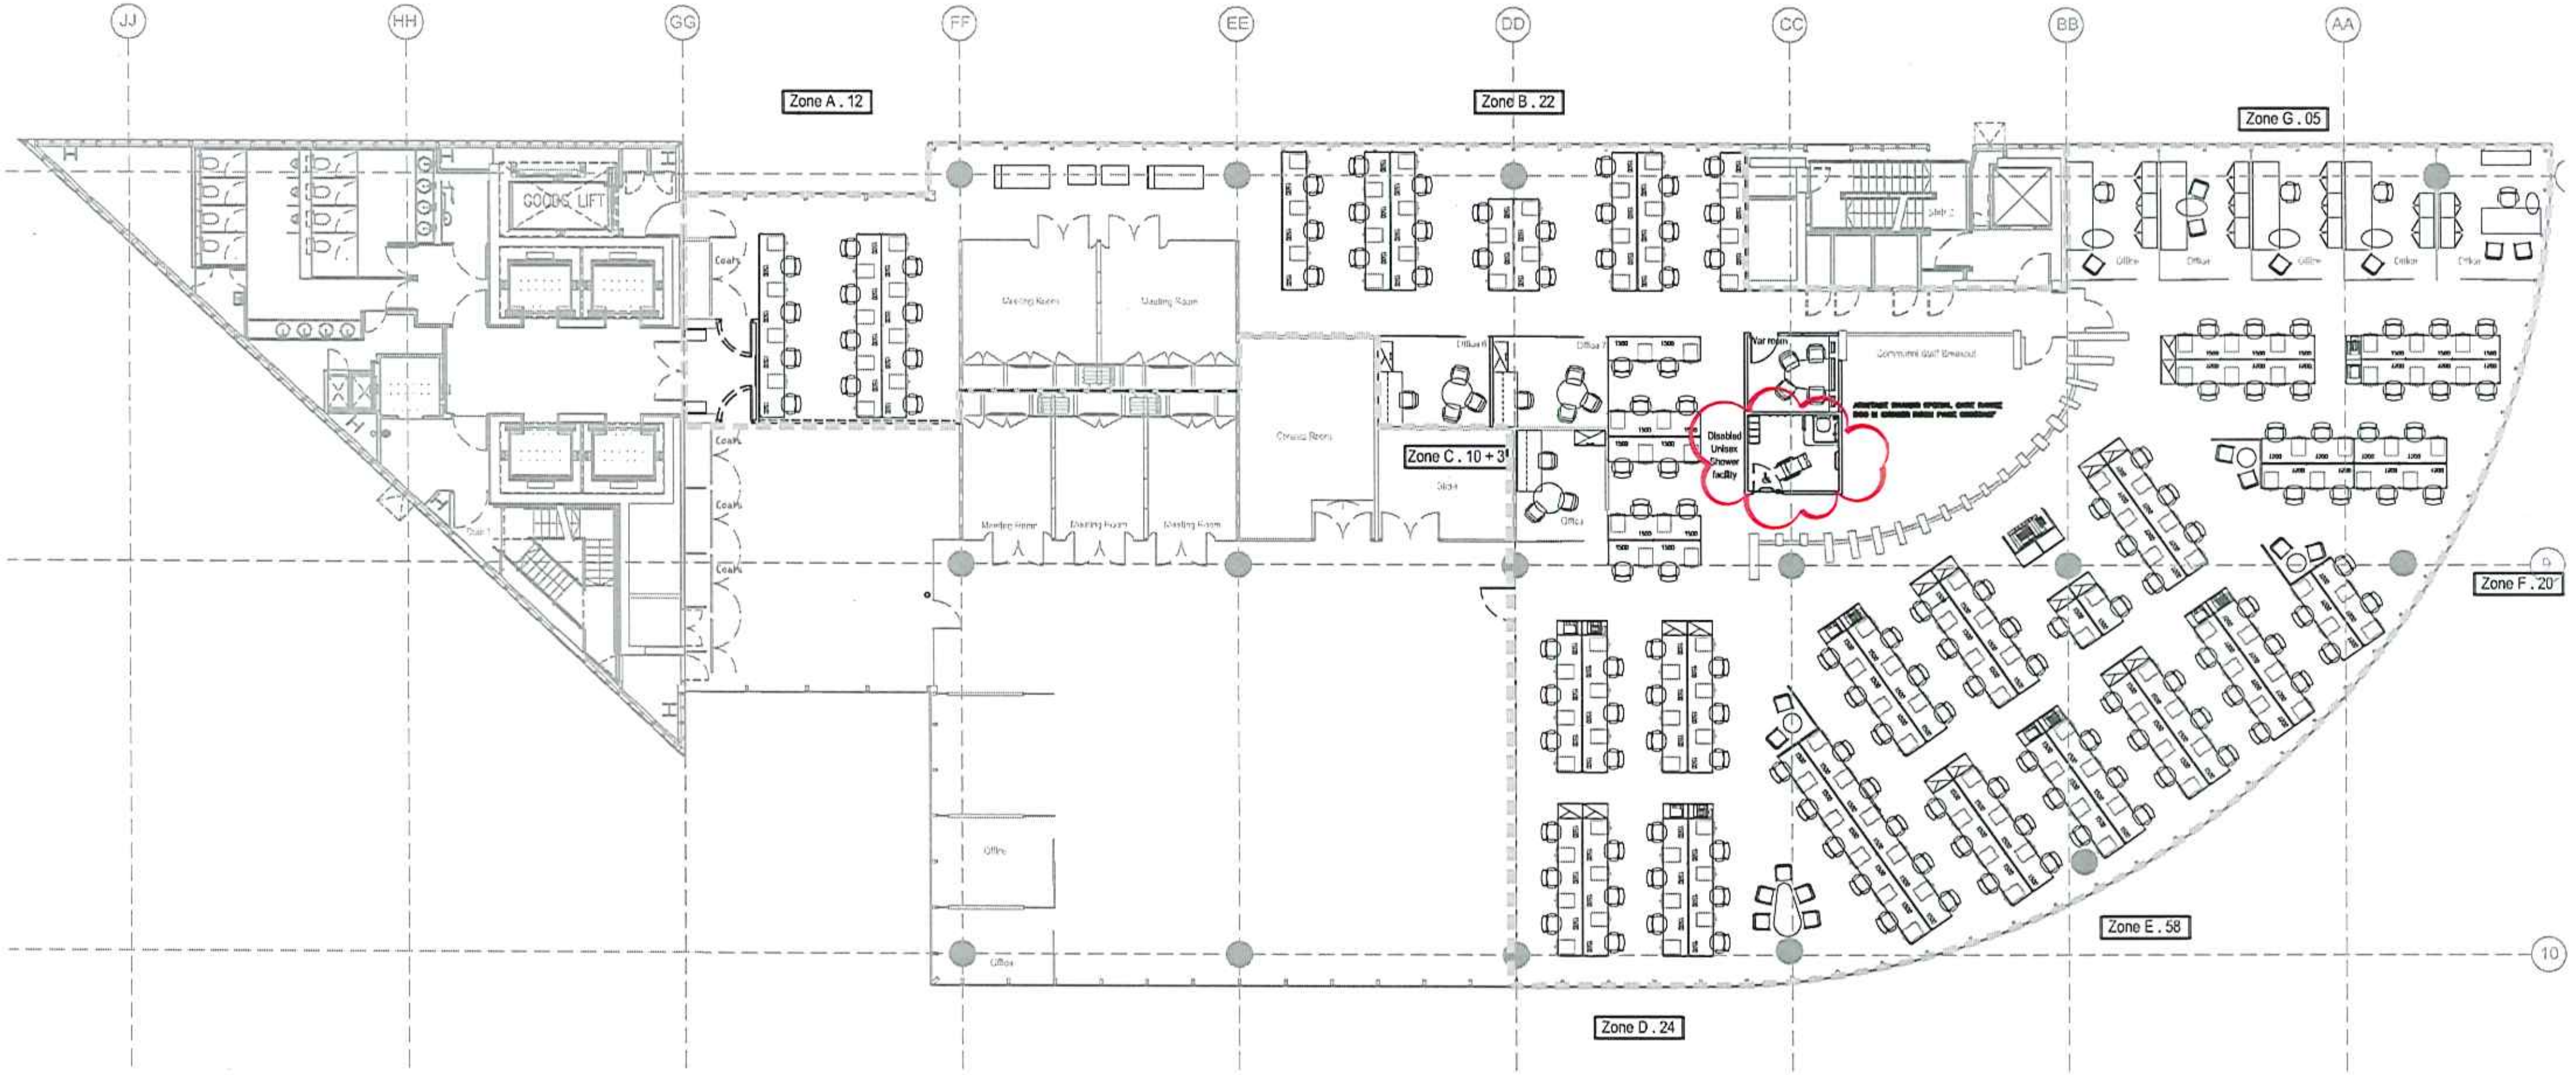
JJ
HH
GG
FF
EE
DD
CC
BB
AA
D
10
Zone A . 12
Zone B . 22
Zone G . 05
Zone C . 10 + 3
Zone D . 24
Zone E . 58
Zone F . 20
GOODS LIFT
Coats
Coats
Coats
Coats
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Office
Office
Office
Office
Office
Office
Office
Office 6
Office 7
Var room
Disabled
Unisex
Shower
facility
Communal Staff Breakout
1500
1200

Phase 2 @1500 working module

Zone A = 12
Zone B = 22
Zone C = 10 + 03 [Office] + 1 Meet
Zone D = 24
Zone E = 58
Zone F = 20
Zone G = 0 + 05 [Office]

Total
146 [Workstations] + 08 [Office] + 1 Meet

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

This drawing and information shown are the copyright of Cochrane McGregor

FOR CONSTRUCTION

A Layout amended. 22.11.07
Rev Details Date

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel : 020 7378 1828 Fax : 020 7378 1834
email : design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client **Markit**
Project **2 More London Riverside**
London SE1 2JT
Title **7th Floor Proposed phase 2**
Furniture Layout

Scale 1:100 @ A1 @ A1
Date 05 . 10 . 07
Drawn By JM
Checked By
Project No 5758
Dwg. No [7] 902
Rev. A

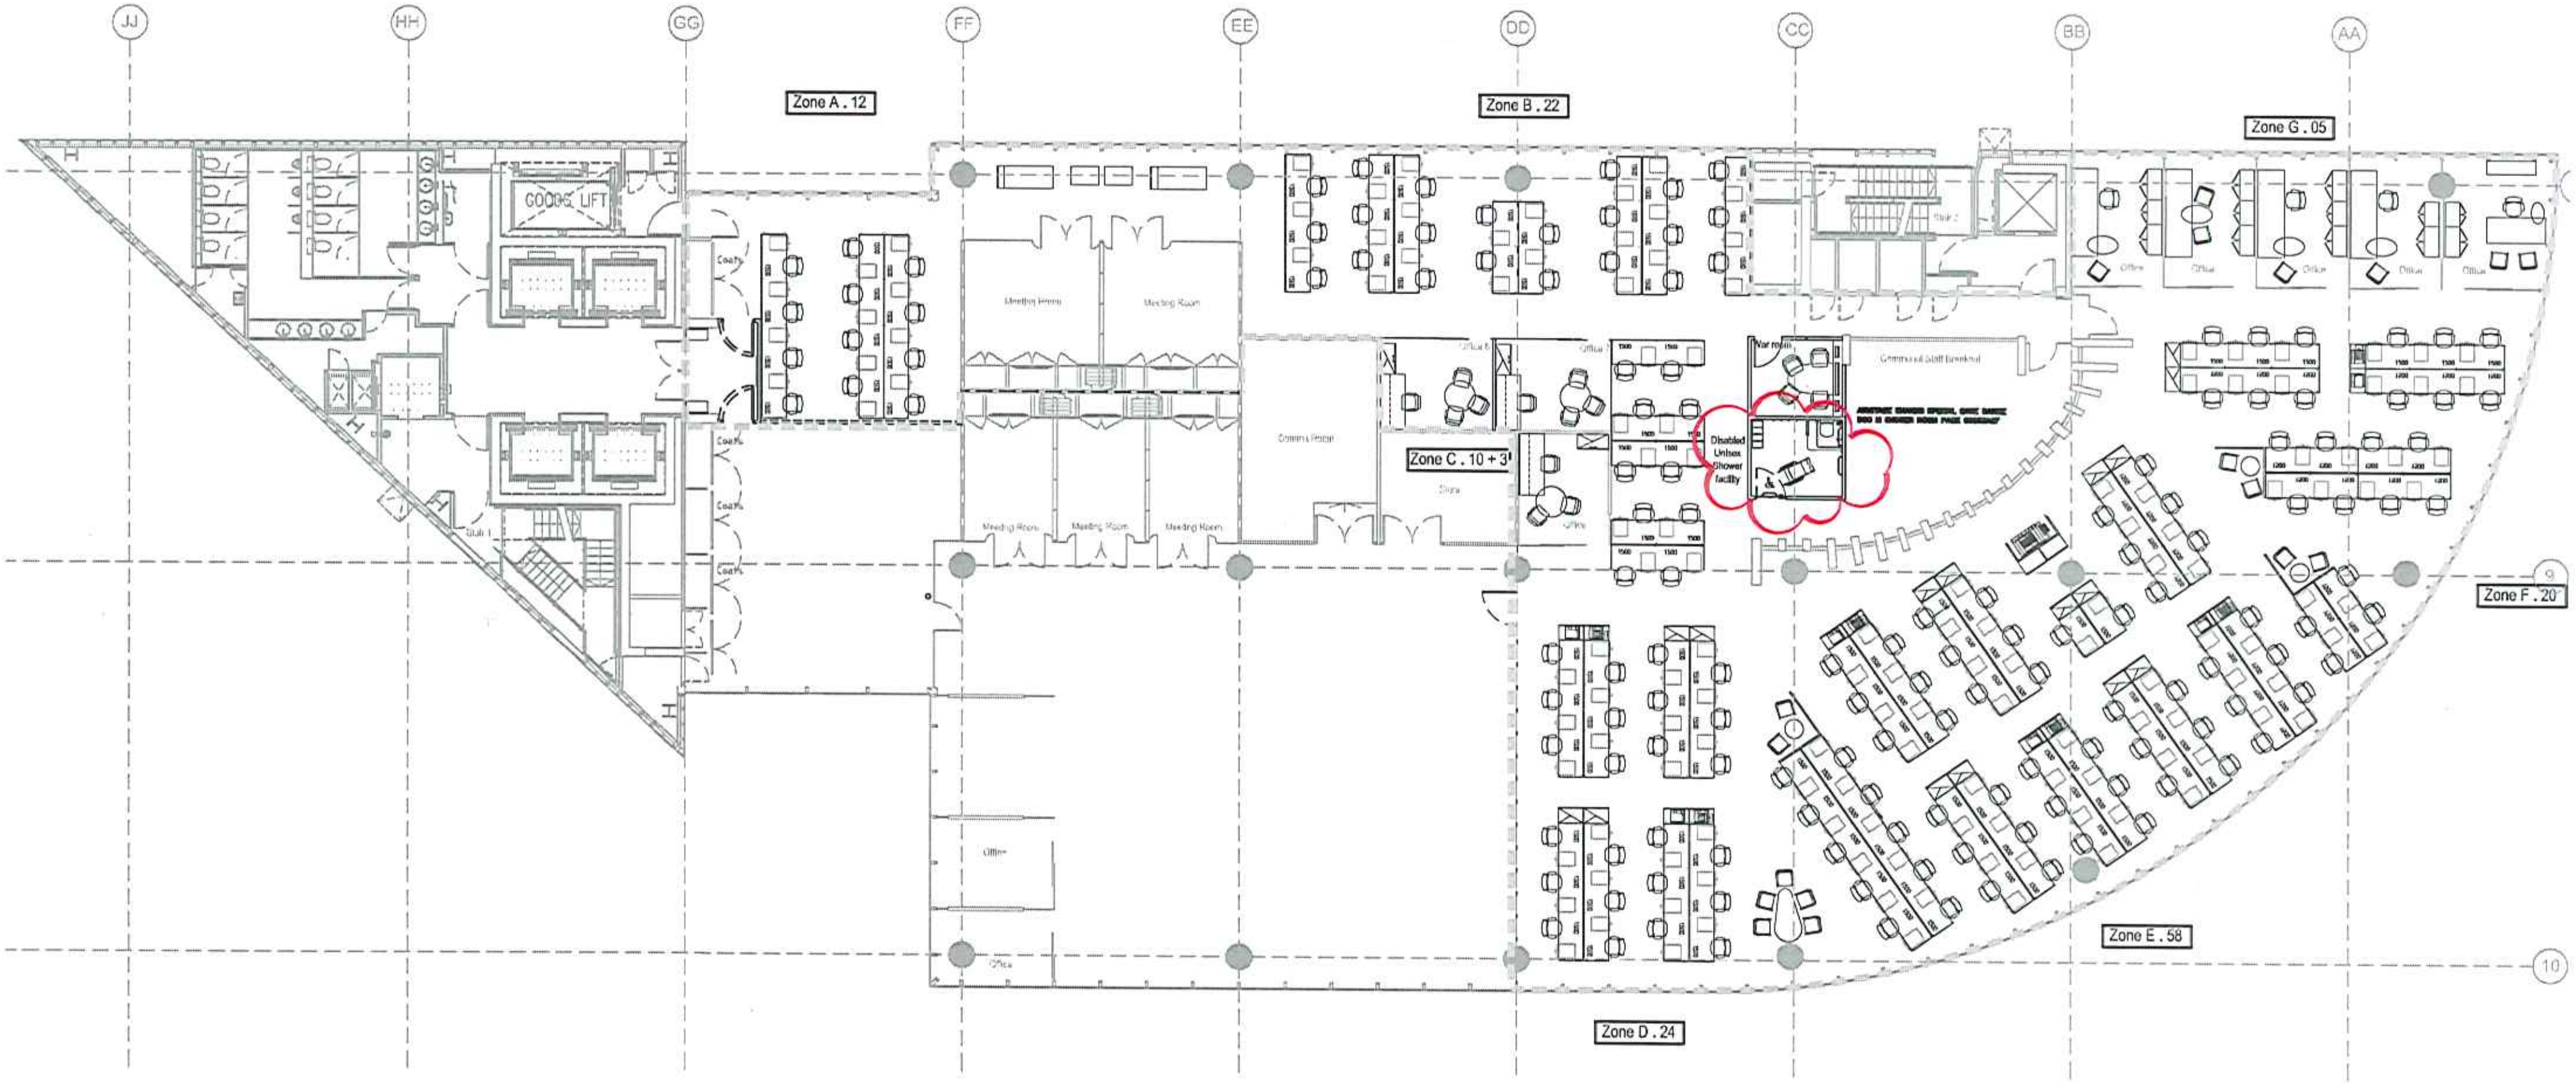
JJ
HH
GG
FF
EE
DD
CC
BB
AA
9
10
Zone A . 12
Zone B . 22
Zone C . 10 + 3
Zone D . 24
Zone E . 58
Zone F . 20
Zone G . 05
GOODS LIFT
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Office
Office
Office
Office
Office
Office
Office
War room
Communal Staff Breakout
Disabled Unisex Shower facility
1500

Phase 2 @1500 working module

Zone A = 12
Zone B = 22
Zone C = 10 + 03 [Office] + 1 Meet
Zone D = 24
Zone E = 58
Zone F = 20
Zone G = 0 + 05 [Office]

Total
146 [Workstations] + 08 [Office] + 1 Meet

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

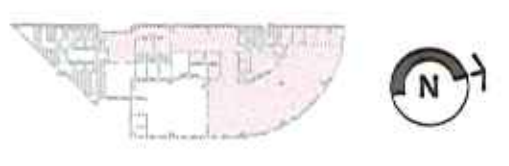

FOR CONSTRUCTION

Rev	Details	Date
A	Layout amended.	22.11.07

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel : 020 7378 1829 Fax : 020 7378 1834
email : design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client: Markit
Project: 2 More London Riverside
London SE1 2JT
Title: 7th Floor Proposed phase 2
Furniture Layout

Scale: 1:100 @ A1 @ A1
Date: 05 . 10 . 07
Drawn By: JM
Checked By:
Project No: 5758
Dwg. No: [7] 902
Rev.: A

FLOOR FINISHES KEY – Refer to 5758[D]840 for details

New Offices & Meeting rooms –
Carpet Tile : To match existing – Lees Squared Type: Golden Rod (2424) Ref: T27722
Replace existing damaged or soiled carpet tiles as required.

Front of–house Reception Floor –
Stone – Retain existing stone floor finish. Make good any damage & buff/polish

Breakout / Cafe zone –
Stone – Retain existing stone floor finish. Make good any damage & buff/polish

Shower / Changing Facility –
Vinyl– Epoxy Vinyl to floor offered up to & dressed on to a 100mm coved skirting detail.
Refer to 5758[D]800 for Vinyl & skirting detail.

Shower / Changing Facility –
Sanitary Equipment – Shower tray with top face set flush to FFL. Refer to 5758[D]800 for Shower details.

WALL FINISHES KEY – Refer to 5758[D]850 for details

New Office –
Glass : Matt top coat to match existing – 2 layers undercoat.

New Office & Meeting rooms –
Paint : Matt top coat to match existing – 2 layers undercoat.

War room –
Paint : Matt Emulsion RAL 5019 top coat – 2 layers of standard white undercoat.

Specialist areas
Paint : 2 layers of standard white undercoat preparation to receive joinery. Refer to 5758[D]800 & 5758[D]810 for Joinery details.

Shower / Changing Facility –
Tile – Standard white Ceramic wall tile 200x100mm offered from skirting to underside of ceiling. Off–white grouting with fungal inhibitor. Refer to 5758[D]800 for tile details.

DOOR FINISHES KEY – Refer to 5758[D]860 for door details

NOTE Existing Lift Lobby doors –
Remove existing lift lobby door leaves and store. Make good floor and ceiling as required. Site inspection required.

G1 Main Entrance –
Glass : New glass lobby door with 100mm top and base metal sections to match detail and finish of existing lift lobby doors. 3M dusted crystal manifestation pattern applied to inner face Site inspection required. Refer to 5758[D]860 for details.

G2 Offices –
Glass : Proprietary Sliding glass door to match existing office doors. 3M dusted crystal manifestation pattern applied to inner face. Satin s.s. 'D' form pull–push handles to either side. Site inspection required. Refer to 5758[D]860 for details.

S1 Meeting room –
Solid : Cherry veneer finish with 3M dusted crystal manifestation film applied to inner face of vision panel. Satin s.s. lever, Rose and Thumb turn cylinder lock..

S2 Shower / Changing Facility –
Solid : Cherry veneer finish with satin s.s. kick plates and 'D' form pull–push handles to either side. Satin s.s. disabled turn and release lock with indicator to be fitted.

EXISTING FINISHES –

NOTE GENERAL : Existing General open plan, Office & Meeting rooms –
Protect all existing finishes as necessary. Site inspection required.

FLOORS : Existing General open plan, Office & Meeting rooms –
Replace existing damaged or soiled carpet tiles as required. [Make & Type tbc]
Site inspection & report required.

WALLS : General open plan, Existing Office & Meeting rooms –
Make good any damage to existing wall surfaces and redecorate to match existing.
Site inspection & report required.

DOORS : Existing General open plan, Office & Meeting rooms –
Make good any damage to existing doors and perimeter elements and redecorate to match existing. Site inspection & report required.

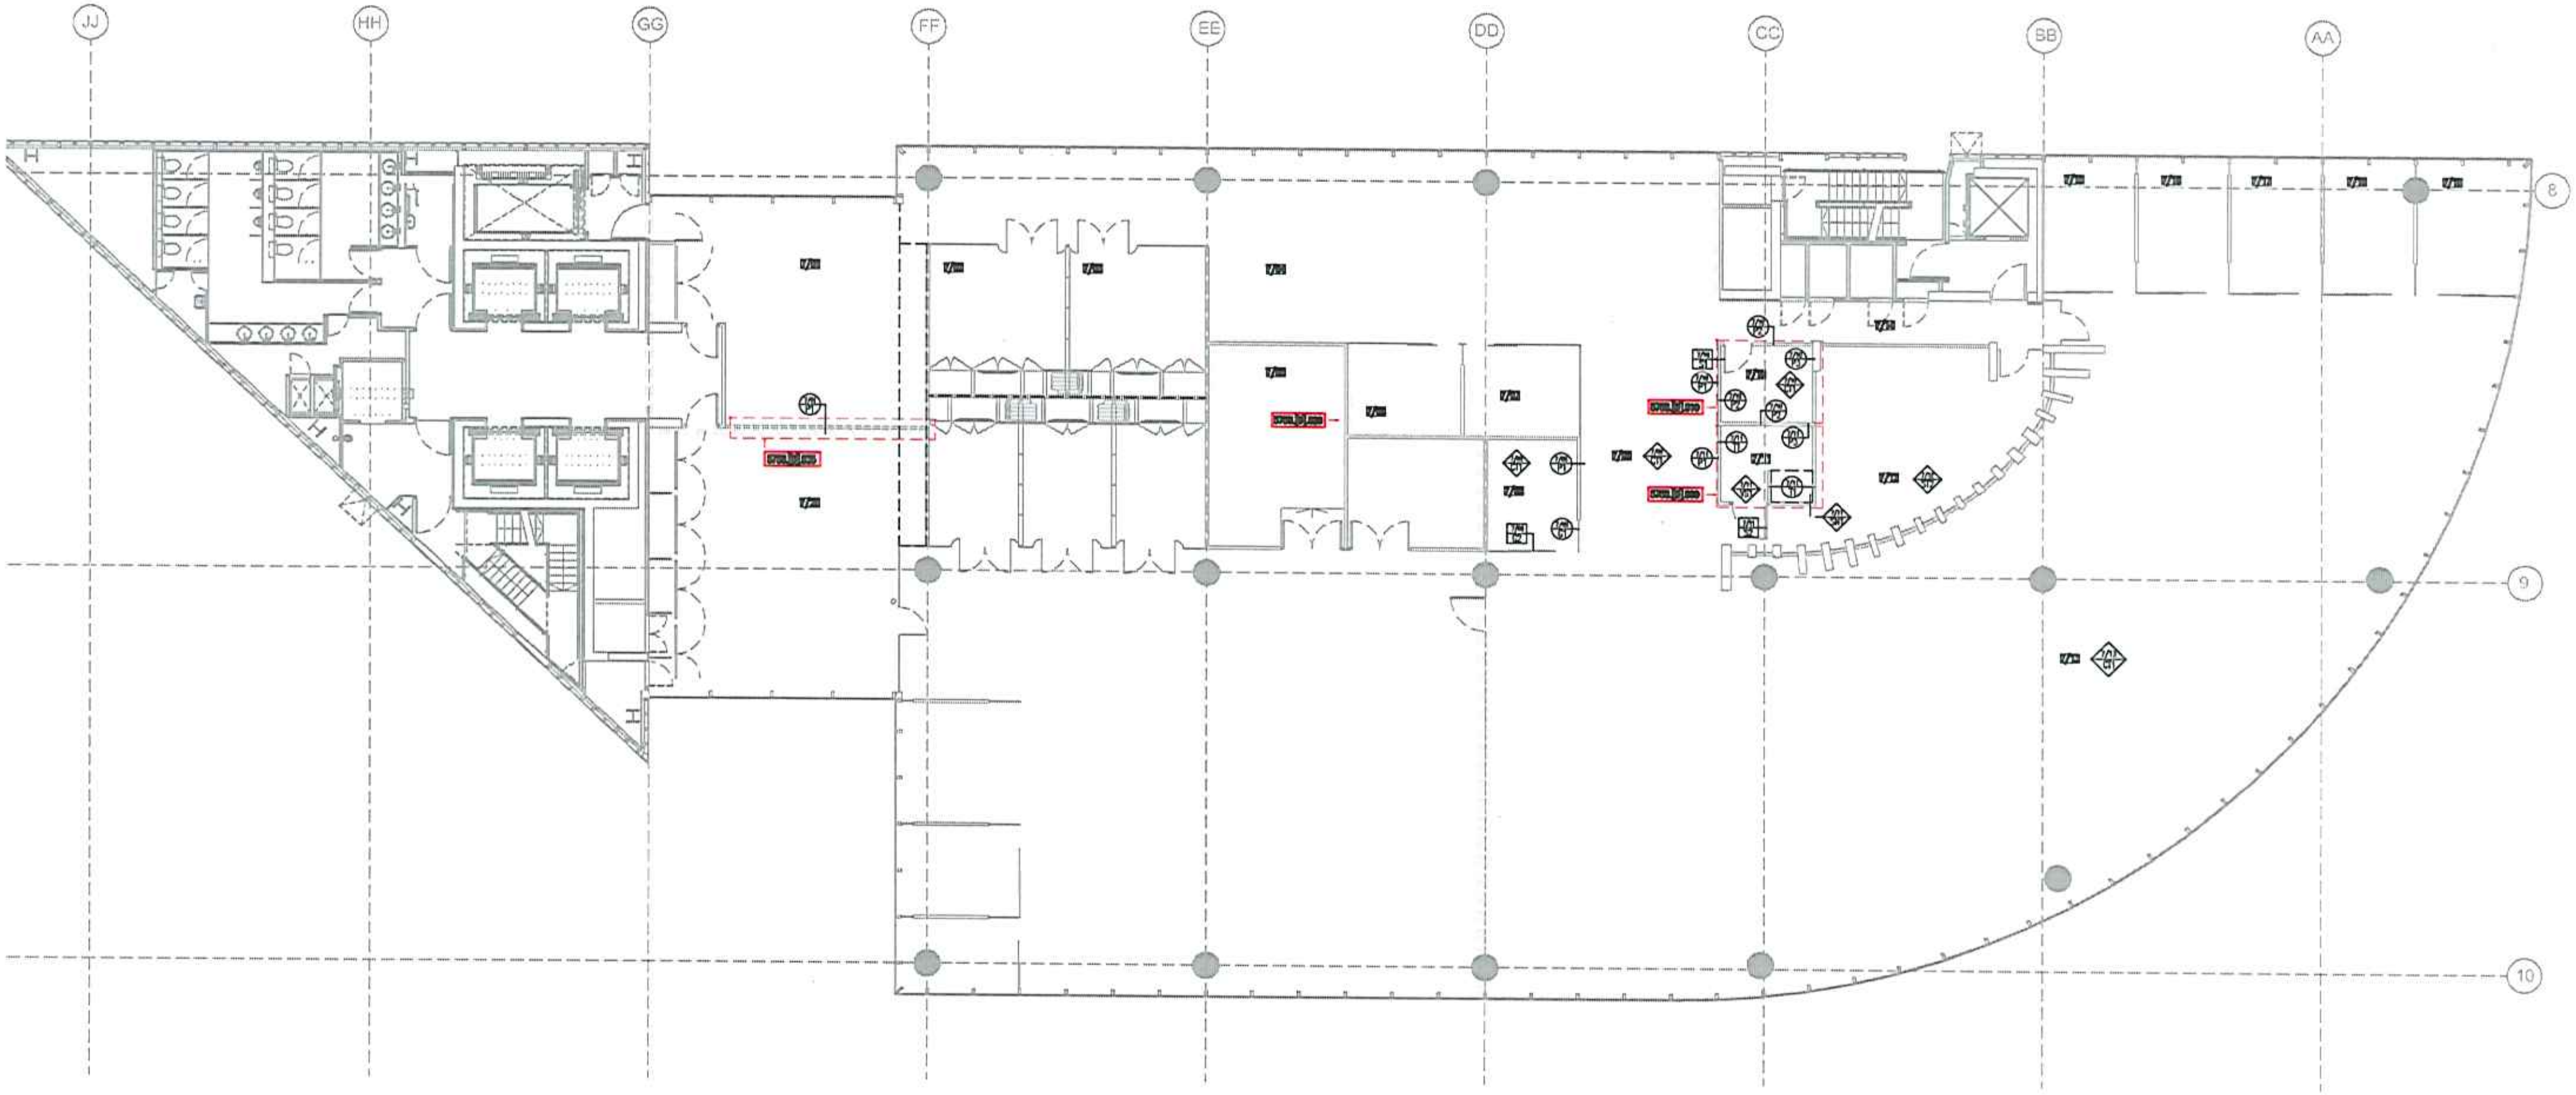

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

FOR CONSTRUCTION

Rev	Details	Date
A	Drawing updated	14.11.07

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel | 020 7378 1628 Fax | 020 7378 1634
email | design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client Markit
Project
2 More London Riverside
London SE1 2JT
Title
7th Floor Proposed
Finishes Layout Phase 2

Scale 1:100 @ A1
Date 10 . 11 . 07
Drawn By RIT
Checked By
Project No 5758
Dwg. No [7] 702
Rev. A

▨ Scope of Dismantling works. ▨ Scope of Demolition works.

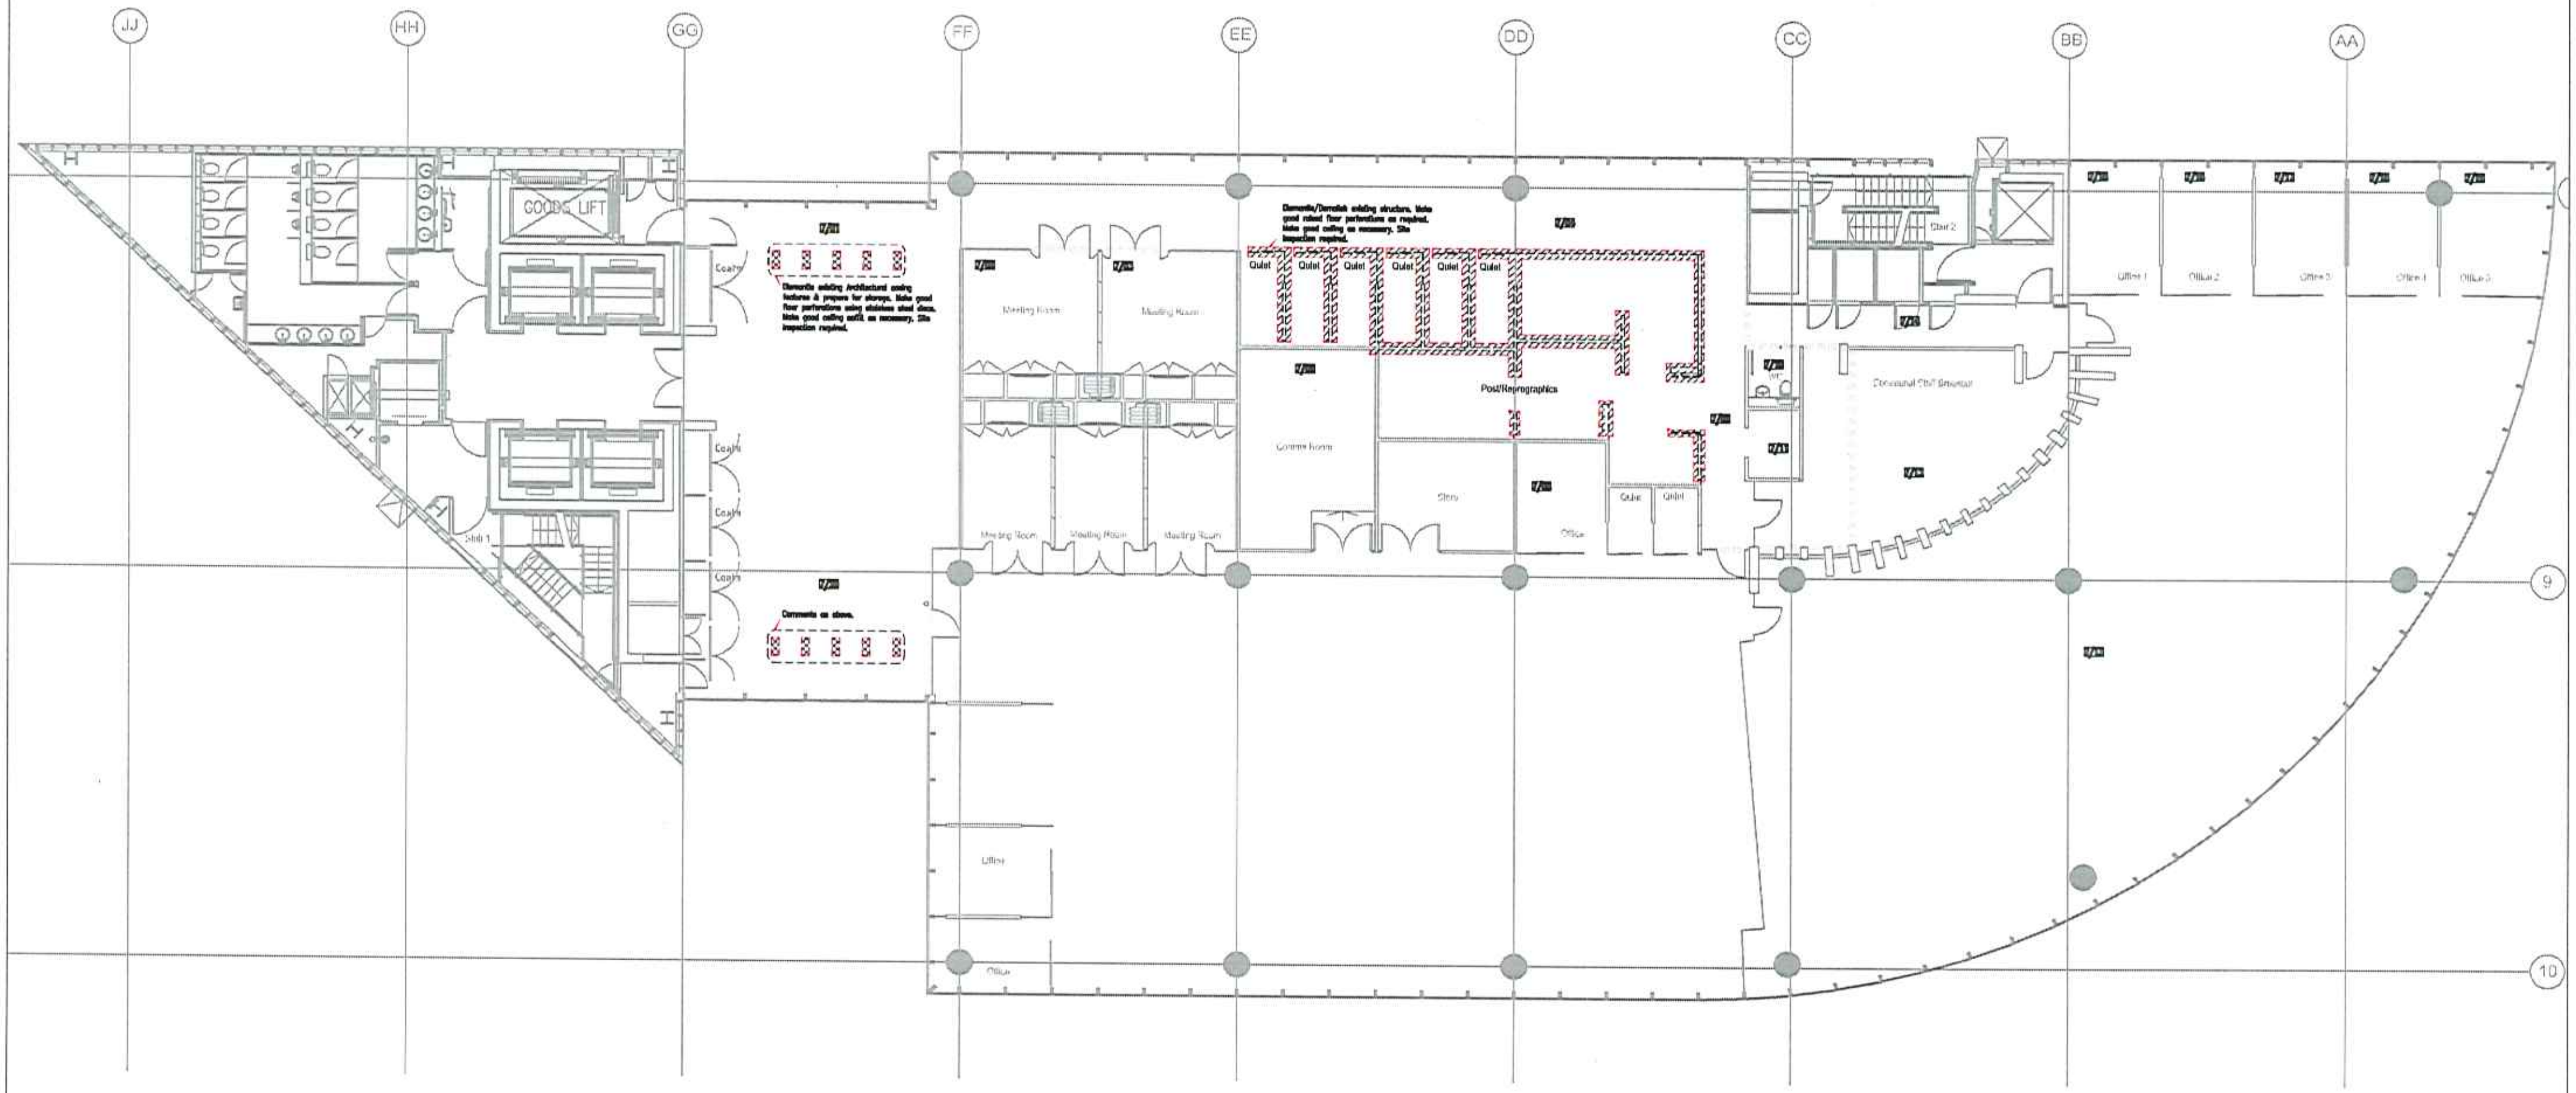
JJ
HH
GG
FF
EE
DD
CC
BB
AA
9
10
H
GOODS LIFT
Coats
Coats
Coats
Coats
Stair 1
Stair 2
Dismantle existing Architectural seating features & prepare for storage. Make good floor perforations using stainless steel discs. Make good ceiling soffit, as necessary. Site inspection required.
Comments as above.
Dismantle/Demolish existing structure. Make good raised floor perforations as required. Make good ceiling as necessary. Site inspection required.
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Quiet
Quiet
Quiet
Quiet
Quiet
Quiet
Comms Room
Post/Reprographics
Store
Office
Quiet
Quiet
WC
Divisional Staff Breakout
Office 1
Office 2
Office 3
Office 4
Office 5
Office
Office

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

This drawing and information shown are the copyright of Cochrane McGregor

FOR CONSTRUCTION

Rev	Details	Date
A	Key added	16.11.07

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel: 020 7378 1820 Fax: 020 7378 1834
email: design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client **Markit**

Project **2 More London Riverside**
London SE1 2JT

Title **7th Floor Demolition works**
Phases 1

Scale NTS @ A1
Date 07 . 09 . 07
Drawn By RT
Checked By
Project No 5758
Dwg No [7] 301
Rev. A

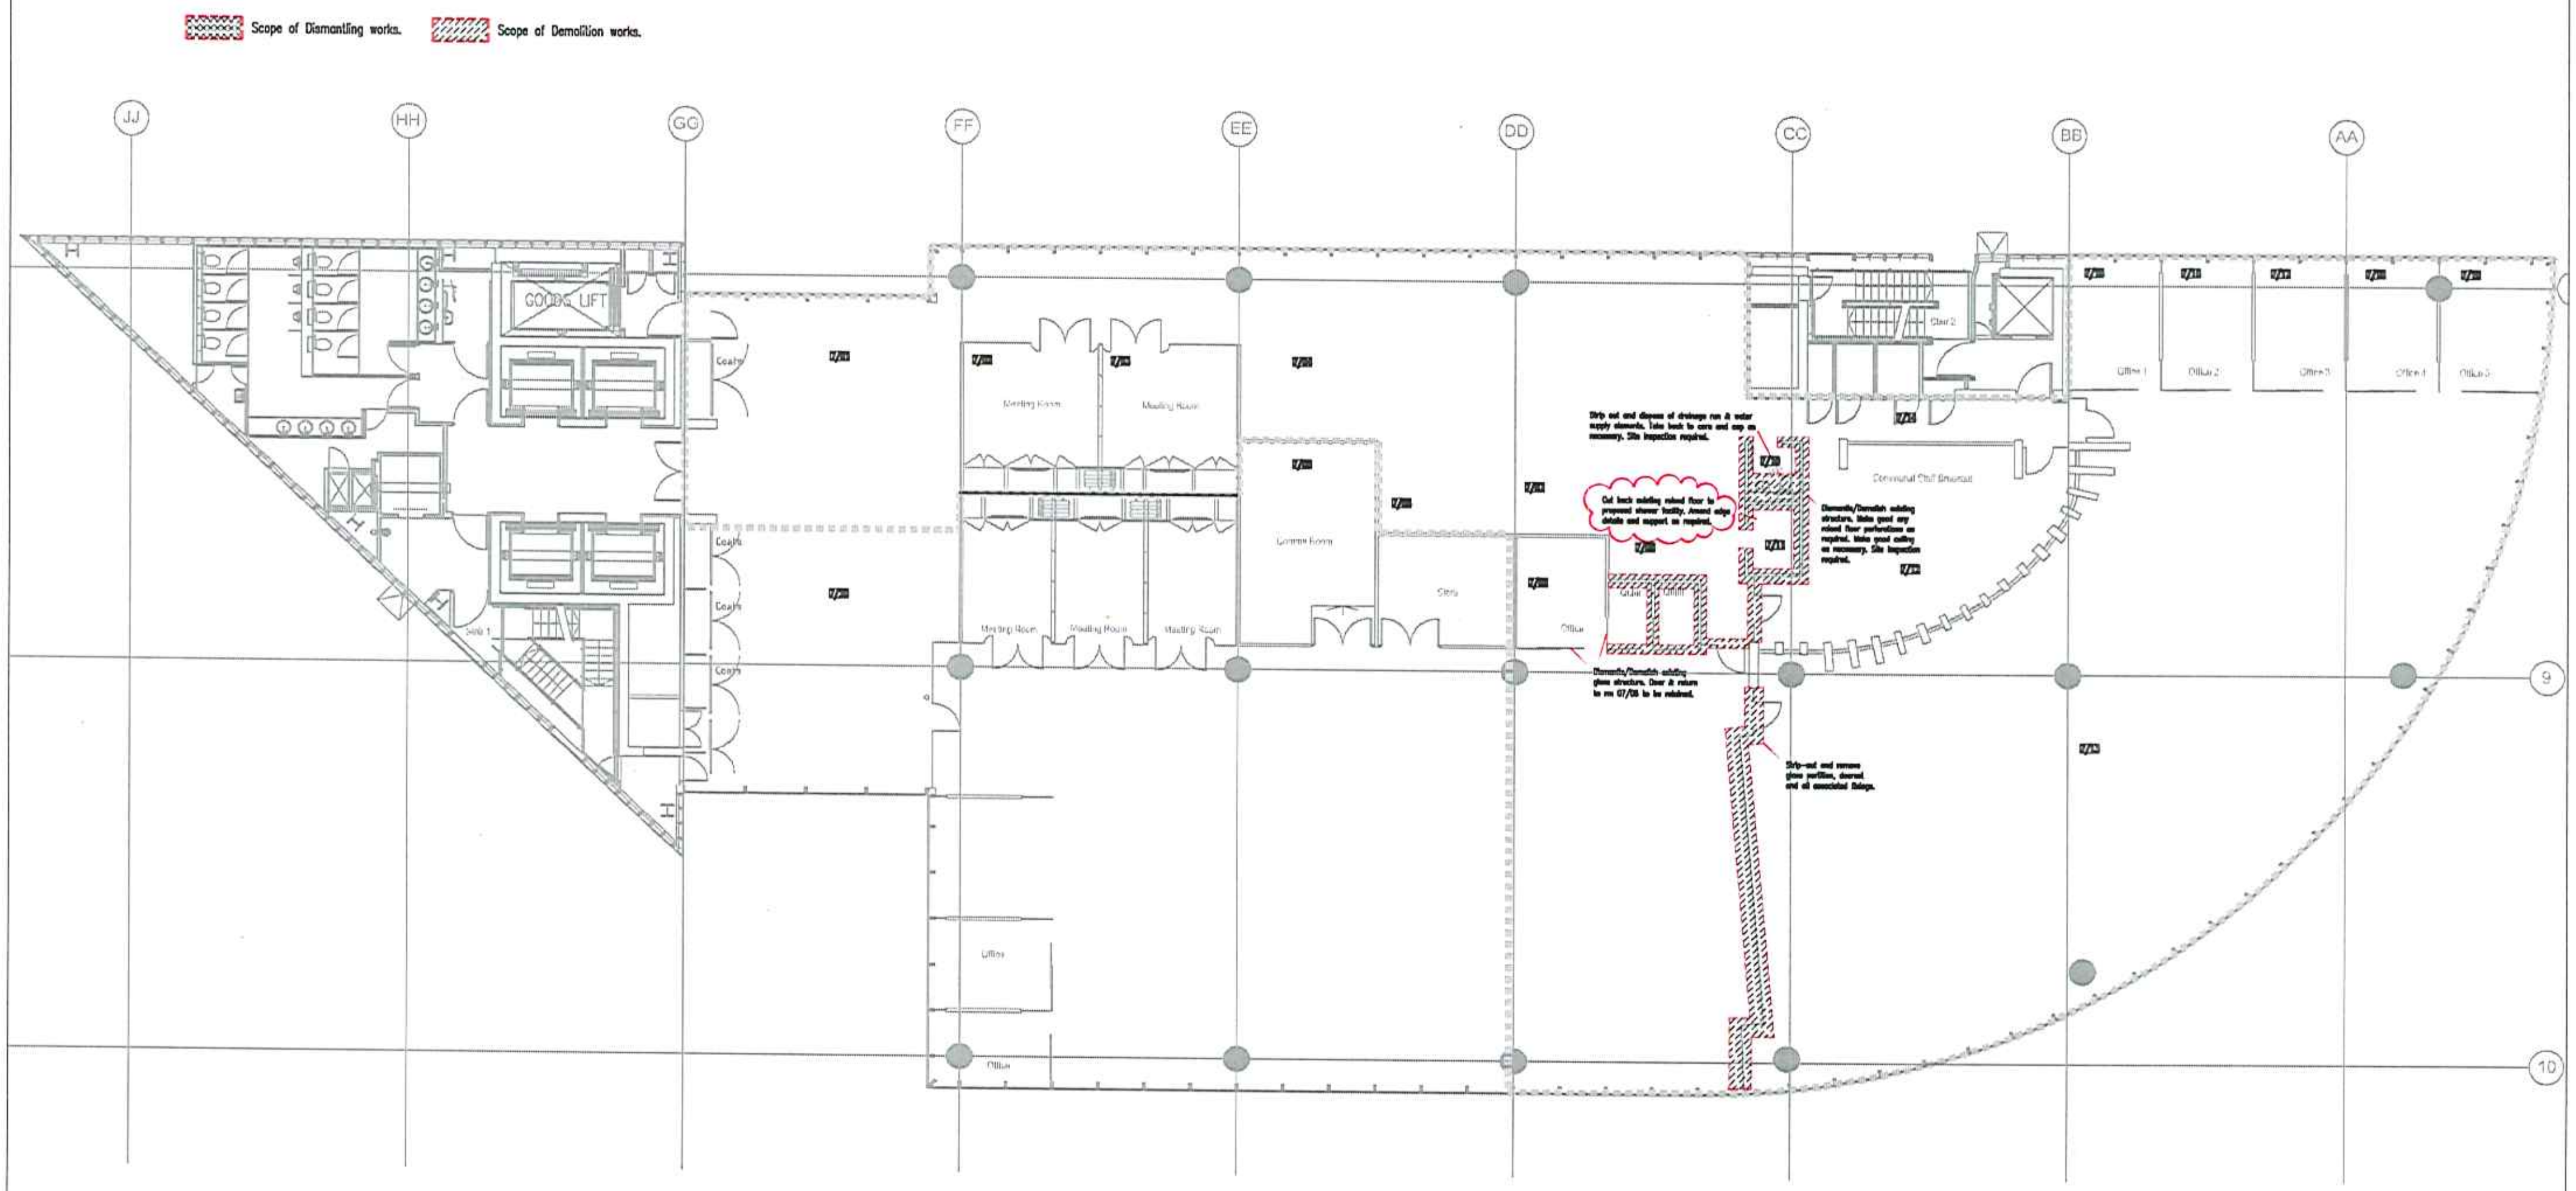
Scope of Dismantling works.
Scope of Demolition works.
JJ
HH
GG
FF
EE
DD
CC
BB
AA
9
10
GOODS LIFT
Coats
Stair 1
Stair 2
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Meeting Room
Comms Room
Office
Office
Office
Communal Staff Breakout
Office 1
Office 2
Office 3
Office 4
Office 5
Strip out and dispose of drainage run & water supply elements. Take back to core and cap as necessary. Site inspection required.
Cut back existing raised floor to proposed shower facility. Amend edge details and support as required.
Dismantle/Demolish existing structure. Make good any raised floor perforations as required. Make good ceiling as necessary. Site inspection required.
Dismantle/Demolish existing glass structure. Door & return to rm 07/08 to be retained.
Strip-out and remove glass partition, doorset and all associated fixings.

DO NOT SCALE

All dimensions are to be verified on site prior to the start of work, and any discrepancies notified in writing

This drawing and information shown are the copyright of Cochrane McGregor

N

FOR CONSTRUCTION

Rev	Details	Date
B	Scope of works amended	22.11.07
A	Key added	16.11.07

Cochrane McGregor
Design for Corporate Change
136 Tooley Street London SE1 2TU
Tel : 020 7378 1828 Fax : 020 7378 1834
email : design@cochrane-mcgregor.com
www.cochrane-mcgregor.com

Client **Markit**
Project **2 More London Riverside London SE1 2JT**
Title **7th Floor Demolition works Phases 2**

Scale NTS @ A1
Date 07 . 09 . 07
Drawn By RT
Checked By
Project No 5758
Dwg. No [7] 302
Rev. B